

PRODUCT DATASHEET

Recessed Panel light HYD-102S-9W 4000K



Application

- Office
- Kitchen
- Rest room
- Corridor
- Shop

Benefits

- Flicker free.
- The light is soft and bright
- Drive stable, safe and reliable
- High light transmission mask to ensure uniform light

Features

- Efficient and durable
- Easy and quick installation
- Light body thin design, reduce space occupancy
- Die-cast aluminum body for better heat dissipation, anti-corrosion, and easy maintain

February,25,2024 Product Datasheet HYD-102S-9W 4000K





Electrical Data

Nominal wattage (W)	9W	
Nominal Voltage (V)	220	
Mains Frequency (Hz)	50	
Nominal Current (mA)	68	
LED Driver Current (mA)	250	
LED Driver Voltage (VDC)	30-42	
LED Driver Efficiency (%)	83%	
Power Factor λ	0.55C	
Total harmonic distortion (%)		
Operating mode	External LED Driver	

Photometrical data

738 lm			
87 lm/w			
4000K			
Natural White			
≥80			
≤5 SDCM			
264			
Flicker free			
111 °			








Dimensions & Weight

Diameter (mm)	146*146
Height (mm)	35
Product weight (g)	255



D 146*146mm

H 35mm

Material & Colors

Product color	All White		
Housing color	White		
Body material	Aluminum		
Cover material	PS LGP material		
Mercury content	0.0 mg		

Application & Mounting

-20°C~+50 °C		
-25°C~+60 °C		
Screwless terminal		
IP20		
No		
Recesse mounted		
Ceiling		
Indoor		
130*130		
Not replaceable		
Yes		




Certificates & Lifespan

Life (h)	50,000	
Certificates	CB LVD EMC RoHS	
Standards	ISO9001:2015	

Logistical Data

Product code	Dimensions	Pcs/	G.W.	Volume
	(L*W*H)	carton	kg	CBM
HYD-102S-9W	53*20*42.5 cm	30		0.04505

Installation Method

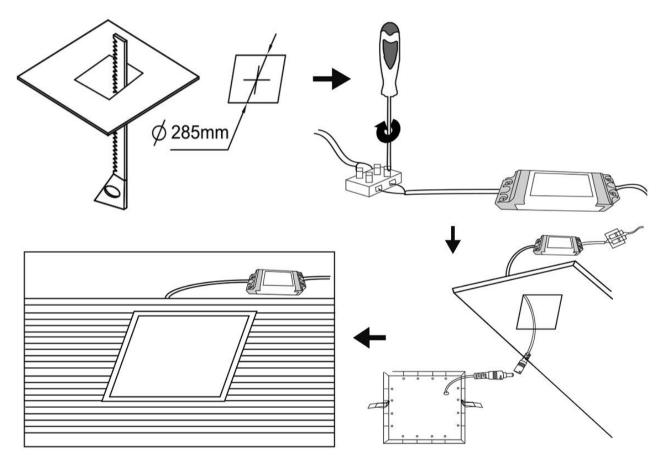

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.