

PRODUCT DATASHEET

Recessed Panel light HYD-P7-15W 3000K



Application

- Office
- Kitchen
- Rest room
- Corridor
- Shop

Benefits

- Flicker free.
- The light is soft and bright
- DOB, integrated design, stable structure
- High light transmission mask to ensure uniform light

Features

- Warranty 2-3 years
- Efficient and durable
- Easy and quick installation
- PC housing and transparent mask material, not easy to deform and change color





Electrical Data

Nominal wattage (W)	15W
Nominal Voltage (V)	220
Mains Frequency (Hz)	50
Nominal Current (mA)	119
Power Factor λ	0.5
Operating mode	DOB

Photometrical data

Luminous flux ±10% (lm)	1377		
Luminous efficacy (lm/w)	93		
Color temperature	3000K		
Light color (designation)	Warm White		
Color rendering index Ra	≥80		
Standard deviation of color matching	≤5 SDCM		
Luminous intensity/cd	497		
Flickering	Flicker free		
Beam angle	111 °		

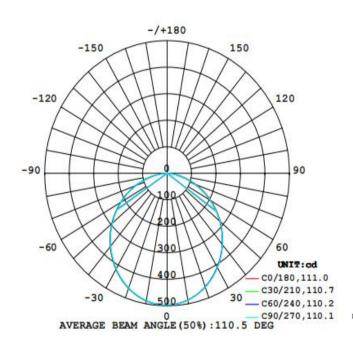

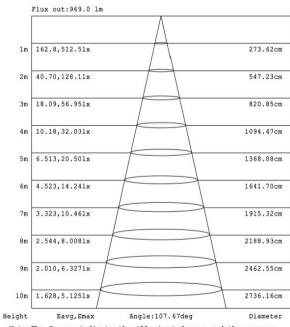


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

IES



Dimensions & Weight

Diameter (mm)	173
Height (mm)	25
Product weight (g)	

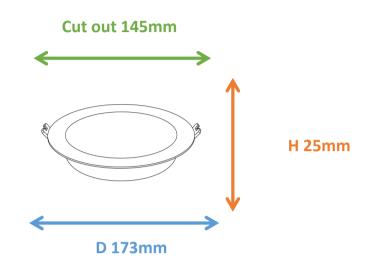

Material & Colors

Product color	All White	
Housing color	White	
Body material	PC	
Cover material	PC	
Mercury content	0.0 mg	

Application & Mounting

Ambient temperature range	-10°C~+40 °C		
Temperature range at storage	-10°C~+40 °C		
Type of connection	Screwless terminal		
Type of protection	IP20		
Dimmable	No		
Mounting type	Recesse mounted		
Mounting location	Ceiling		
Application environment	Indoor		
Cut size (mm)	145		
LED module replaceable	Not replaceable		
With light source	Yes		




Certificates & Lifespan


Life (h)	20,000		
Certificates	CB LVD EMC RoHS		
Standards	ISO9001:2015		


Logistical Data

Product code	Dimensions (L*W*H)	Pcs/ carton	G.W.	Volume CBM
HYD-P7-15W	56*38*42.5cm	60	•••	0.09044

Installation Method









Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release