

## **PRODUCT DATASHEET**

# Evergreen Style Design Recesse Mounted Panel Light HYD-116C-10W 3K/4K/6K



## **Application**

- Household living room
- Mall
- Commercial place
- Corridors
- Hotel

## **Benefit**

- Flicker free
- Low lumen depreciation
- Internal reflector to increase optical efficiency
- Detachable driver design or DOB design could be option

#### **Feature**

- Warranty 5 years
- Yellowing-resistant diffuser (PC)
- $\bullet$  Buckle design, easy and quick installation
- Die-cast aluminum body for better heat dissipation, anti-corrosion




#### **Electrical Data**


Nominal wattage (W)	10W
Nominal Voltage (V)	220-240
Mains Frequency (Hz)	50-60
Nominal Current (mA)	86
LED Driver Current (mA)	250
LED Driver Voltage (V)	30-42V
LED Driver Efficiency (%)	83%
Power factor λ	0.6C
Total harmonic distortion (%)	
Operating mode	External LED driver

#### **Photometrical data**

Luminous flux ±10% (lm)	901.8	1002	962
Luminous efficacy (lm/w)	88.2	98	95
Color temperature	3000K	4000K	6000K
Light color (designation)	Warm White	Nature White	Cold White
Color rendering index Ra	≥80		
Standard deviation of color matching	≤5 SDCM		
Luminous intensity	347 cd		
Flickering	Flicker free		
Beam angle	110 °		



June,28,2025 **Product Datasheet** HYD-116C-10W 3K/4K/6K




Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



**Dimensions & Weight** 

Diameter (mm)	120
Height (mm)	24
Product weight (g)	200

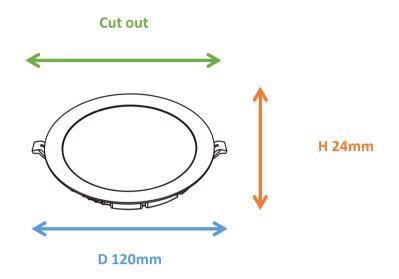

## **Material & Colors**

Product color	White sink / White frame	
Housing color	White	
Body material	Aluminum	
LGP material	PC	
Mercury content	0.0 mg	

**Application & Mounting** 

Ambient temperature range	-10-40 °C	
Temperature range at storage	-10-40 °C	
Type of connection	Screwless terminal	
Type of protection	IP20	
Dimmable	No	
Mounting type	Recesse mounted	
Mounting location	Ceiling	
Application environment	Indoor	
Cut size (mm)	95	
LED module replaceable	Not replaceable	
With light source	Yes	




**Certificates & Lifespan** 


Life (h)	50,000	
Certificates	CB / CE	
Standards	ISO9001:2015	

## **Logistical Data**

Product code	Dimensions	Pcs/	G.W.	Volume
	(L*W*H)	carton	kg	CBM
HYD-116C-10W	64.5*27*29.5 cm	50	•••	0.05137

### **Installation Method**









## **Disclaimer**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.