


室内灯具光度数据


实测参数: U:220.15V I:0.4599A P:98.292W PF:0.9707 Freq:50.00Hz 实检光通: 15308.3x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

光源数据		光度数据				光效: 155.74 lm/W
型号	俄罗斯GGL-710-100W	峰值光强(cd)	8631	S/MH(C0/180)	1.25	
标称功率(W)	100	灯具效率(%)	100.0	S/MH(C90/270)	1.21	
额定电源电压(V)	220	总光通量(lm)	15308	η UP,DN(C0-180)	0.5,51.7	
额定光通量(lm)	15308.3	CIE分类	直接	η UP,DN(C180-360)	0.6,47.2	
灯具内光源数(只)	1	上射光通比(%)	1.1	CIBSE SHR NOM	1.00	
实测电源电压(V)	219.5	下射光通比(%)	98.9	CIBSE SHR MAX	1.15	

室内灯具配光曲线

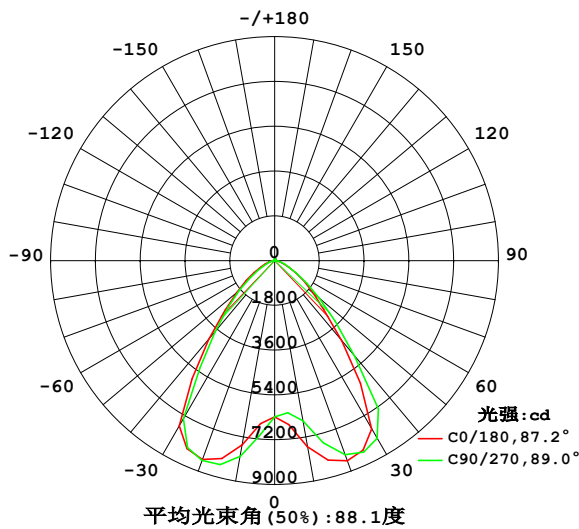

空间等照度曲线(单位: lx)

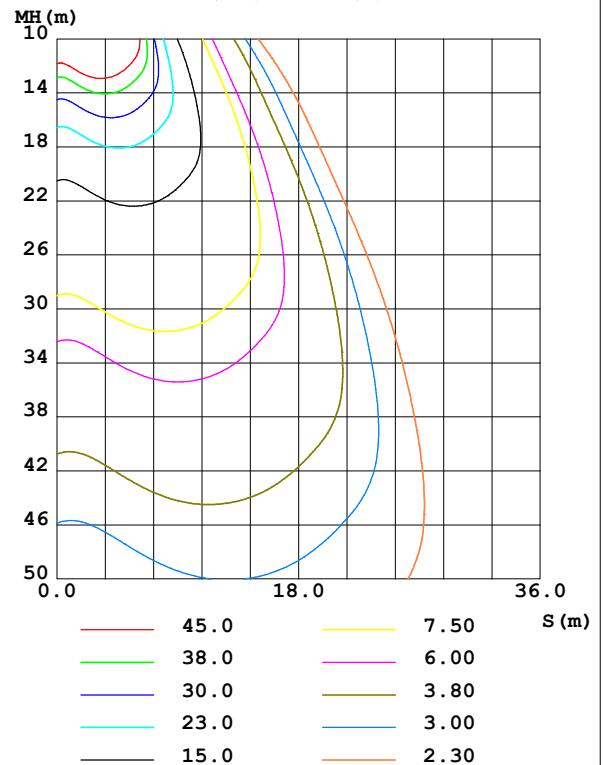

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

Y角度范围: 0度 - 180度
Y角度间隔: 5.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
10	7592	6975	6535	6889	7510	7889	7989	7912	0- 10	655.1	655.1	4.28, 4.28
20	8556	8331	8302	8349	8500	8501	8542	8631	10- 20	2292	2947	19.2, 19.2
30	7810	8075	8247	8073	7667	7187	7343	7568	20- 30	3800	6747	44.1, 44.1
40	4214	4783	5020	4680	4130	3946	3733	4018	30- 40	3771	10518	68.7, 68.7
50	2041	2329	2346	2222	1971	1849	1848	1851	40- 50	2367	12885	84.2, 84.2
60	992.5	1057	1033	998.2	952.1	849.3	784.3	824.4	50- 60	1299	14183	92.7, 92.7
70	421.8	435.7	413.2	419.5	403.8	336.7	301.5	321.3	60- 70	624.1	14807	96.7, 96.7
80	149.2	164.1	170.2	161.4	150.7	127.4	116.8	119.9	70- 80	266.2	15074	98.5, 98.5
90	3.194	3.088	5.473	3.147	3.884	4.192	4.196	4.062	80- 90	72.41	15146	98.9, 98.9
100	5.998	5.557	5.383	5.667	7.386	8.161	8.290	7.961	90-100	5.576	15152	99, 99
110	11.85	10.99	10.72	11.24	14.47	15.65	16.18	15.44	100-110	10.38	15162	99, 99
120	20.74	19.54	19.36	19.99	24.37	25.69	26.37	25.37	110-120	17.70	15180	99.2, 99.2
130	30.59	29.33	29.28	29.82	34.52	35.64	36.18	35.13	120-130	24.71	15204	99.3, 99.3
140	39.21	38.05	38.18	38.29	42.93	43.57	44.04	43.02	130-140	28.46	15233	99.5, 99.5
150	46.47	45.12	44.96	44.92	49.78	50.53	50.85	50.07	140-150	27.79	15261	99.7, 99.7
160	54.59	53.08	52.35	52.72	57.39	59.03	58.81	58.19	150-160	23.80	15285	99.8, 99.8
170	65.70	63.83	63.06	63.77	67.54	68.94	69.35	68.92	160-170	17.14	15302	100, 100
180	72.84	73.05	72.99	73.39	72.99	73.19	73.14	73.49	170-180	6.635	15308	100, 100
单位:°	光强:cd									单位:lm		

锥面光通量(90度): 11867 lm

%lum = 77.5%

%lamp = 77.5%

锥面光通量(130度): 14558 lm

%lum = 95.1%


%lamp = 95.1%

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ 角度范围: 0度 - 180度
 γ 角度间隔: 5.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

灯具亮度限制曲线

实测参数: U:220.15V I:0.4599A P:98.292W PF:0.9707 Freq:50.00Hz 实检光通: 15308.3x1 lm		
灯具名称: 710	灯具类型:UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

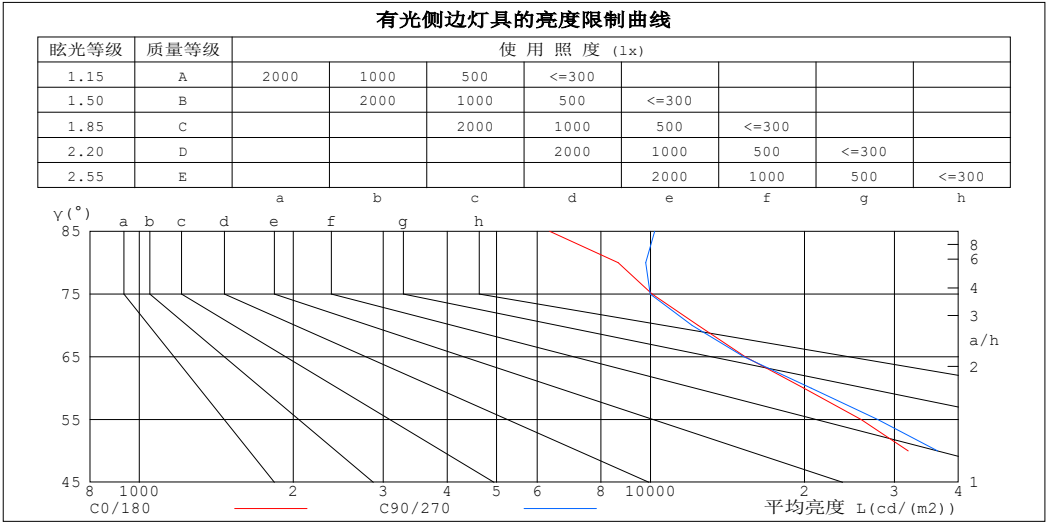

平均亮度值 cd/(m2)		
$\gamma(^{\circ})$	C0/180	C90/270
85	6345	10183
80	8639	9782
75	10073	9980
70	12398	12058
65	15331	15242
60	19953	20629
55	25827	27843
50	31920	36428
45	40028	48689


C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度:25.3℃
测试人员:DAMIN
测试日期:2023-10-14

γ 角度范围: 0度 - 180度
 γ 角度间隔: 5.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度:65.0%
测试距离:9.401米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:220.15V I:0.4599A P:98.292W PF:0.9707 Freq:50.00Hz		
实检光通: 15308.3x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.08	1.04	1.02	1.05	1.02	.00	1.01	.99	.97	.97	.95	.93	.93	.92	.91	.89
2.0	.97	.92	.88	.95	.91	.86	.92	.88	.84	.89	.85	.82	.86	.83	.80	.79
3.0	.88	.82	.76	.87	.81	.76	.84	.78	.74	.81	.77	.73	.78	.75	.72	.70
4.0	.80	.73	.67	.79	.72	.67	.76	.71	.66	.74	.69	.65	.72	.68	.64	.62
5.0	.73	.66	.60	.72	.65	.60	.70	.64	.59	.68	.63	.58	.66	.61	.58	.56
6.0	.67	.59	.54	.66	.59	.54	.64	.58	.53	.62	.57	.53	.61	.56	.52	.50
7.0	.61	.54	.49	.61	.53	.48	.59	.53	.48	.58	.52	.48	.56	.51	.47	.46
8.0	.57	.49	.44	.56	.49	.44	.55	.48	.44	.53	.48	.43	.52	.47	.43	.41
9.0	.52	.45	.40	.52	.45	.40	.51	.44	.40	.50	.44	.40	.49	.43	.40	.38
10.0	.49	.42	.37	.48	.41	.37	.47	.41	.37	.46	.41	.37	.45	.40	.36	.35

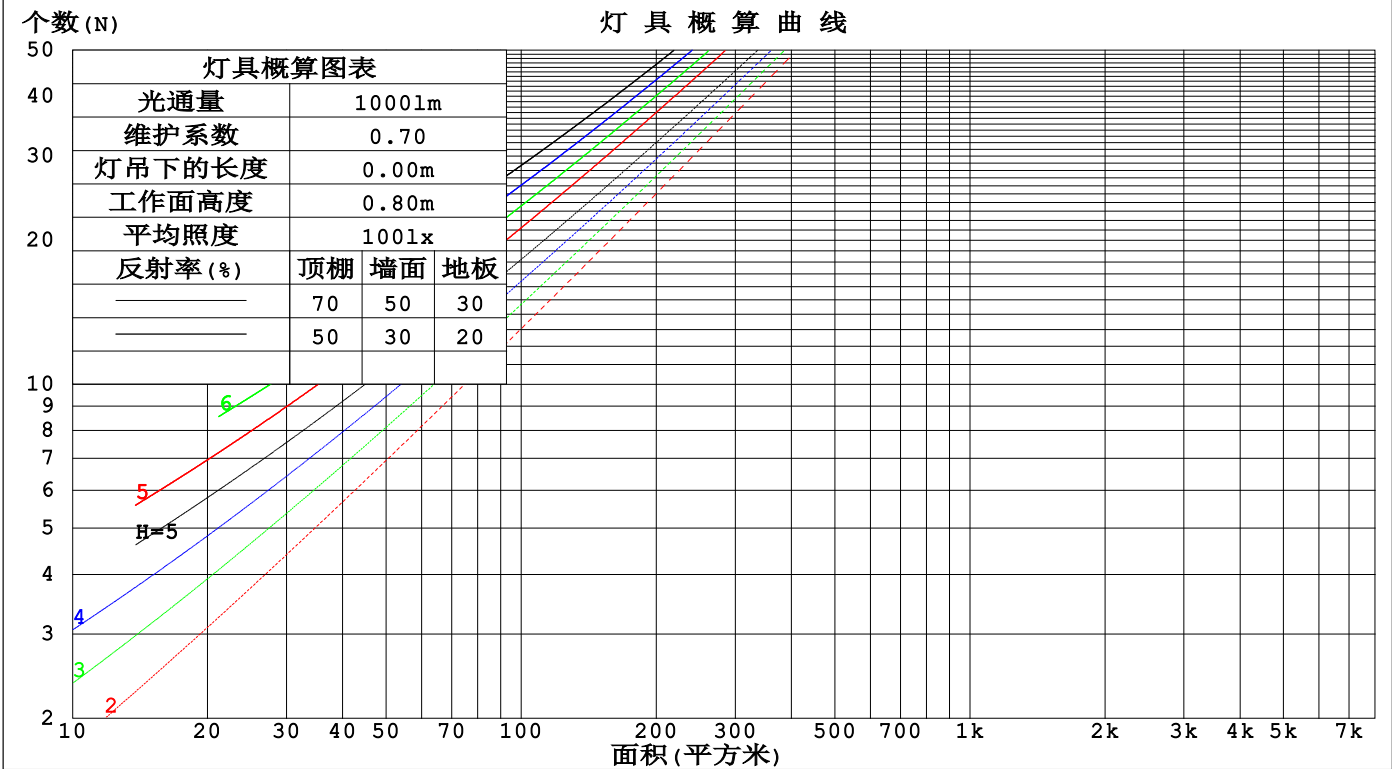

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:220.15V I:0.4599A P:98.292W PF:0.9707 Freq:50.00Hz 实检光通: 15308.3x1 lm					
灯具名称: 710		灯具类型: UFO		灯具重量:	
灯具规格:		外型尺寸:		测试编号:	
制造厂商: EVERFINE		发光口面: 0.1		遮光角:	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.232	.132	.042	.225	.128	.041	.211	.121	.039	.199	.115	.037	.187	.109	.035	
2.0	.224	.123	.038	.218	.120	.037	.206	.114	.036	.195	.109	.034	.185	.105	.033	
3.0	.213	.113	.034	.207	.111	.033	.197	.107	.032	.188	.103	.032	.179	.099	.031	
4.0	.201	.104	.031	.196	.103	.030	.187	.099	.030	.179	.096	.029	.171	.093	.028	
5.0	.190	.097	.028	.186	.095	.028	.178	.093	.027	.170	.090	.027	.163	.087	.026	
6.0	.179	.090	.026	.176	.089	.026	.169	.086	.025	.162	.084	.025	.156	.082	.024	
7.0	.170	.084	.024	.166	.083	.024	.160	.081	.023	.154	.079	.023	.149	.077	.023	
8.0	.161	.079	.022	.158	.078	.022	.152	.076	.022	.147	.074	.021	.142	.073	.021	
9.0	.153	.074	.021	.150	.073	.021	.145	.072	.020	.140	.070	.020	.135	.069	.020	
10.0	.145	.070	.019	.143	.069	.019	.138	.068	.019	.134	.066	.019	.130	.065	.019	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.199	.199	.199	.170	.170	.170	.116	.116	.116	.067	.067	.067	.021	.021	.021	
1.0	.183	.165	.149	.157	.142	.128	.107	.097	.088	.062	.056	.051	.020	.018	.017	
2.0	.171	.140	.114	.147	.121	.099	.101	.084	.069	.058	.049	.040	.019	.016	.013	
3.0	.162	.122	.091	.139	.105	.079	.095	.073	.055	.055	.043	.032	.018	.014	.011	
4.0	.153	.108	.074	.131	.093	.064	.090	.065	.045	.052	.038	.027	.017	.012	.009	
5.0	.146	.097	.061	.125	.084	.053	.086	.059	.038	.050	.035	.022	.016	.011	.007	
6.0	.139	.089	.052	.119	.077	.046	.082	.054	.032	.048	.032	.019	.015	.010	.006	
7.0	.133	.081	.046	.114	.071	.040	.079	.050	.028	.046	.029	.017	.015	.010	.006	
8.0	.127	.076	.040	.109	.066	.035	.076	.046	.025	.044	.027	.015	.014	.009	.005	
9.0	.122	.071	.036	.105	.061	.031	.073	.043	.022	.042	.025	.013	.014	.008	.004	
10.0	.117	.066	.033	.101	.058	.029	.070	.041	.020	.041	.024	.012	.013	.008	.004	

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:220.15V I:0.4599A P:98.292W PF:0.9707 Freq:50.00Hz 实检光通: 15308.3x1 lm												
灯具名称: 710					灯具类型:UFO			灯具重量:				
灯具规格:					外型尺寸:			测试编号:				
制造厂商: EVERFINE					发光口面: 0.1			遮光角:				
反射比:		天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
		墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
		工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸			横向 (Viewed crosswise)					纵向 (Viewed endwise)				
x = 2H y = 2H	2H	13.8	15.0	14.0	15.2	15.4	14.2	15.5	14.5	15.7	15.9	
	3H	14.0	15.1	14.3	15.4	15.6	14.4	15.6	14.7	15.8	16.0	
	4H	14.1	15.1	14.4	15.4	15.6	14.5	15.6	14.8	15.8	16.1	
	6H	14.1	15.1	14.4	15.4	15.7	14.5	15.5	14.9	15.8	16.1	
	8H	14.1	15.0	14.4	15.3	15.6	14.6	15.5	14.9	15.8	16.1	
	12H	14.1	15.0	14.4	15.3	15.6	14.6	15.5	14.9	15.8	16.1	
	4H	2H	13.8	14.9	14.1	15.2	15.4	14.2	15.3	14.6	15.6	15.8
	3H	14.2	15.1	14.5	15.4	15.7	14.6	15.5	14.9	15.8	16.1	
	4H	14.3	15.1	14.7	15.5	15.8	14.7	15.6	15.1	15.9	16.2	
	6H	14.4	15.1	14.8	15.5	15.9	14.9	15.6	15.3	16.0	16.3	
	8H	14.4	15.1	14.8	15.5	15.9	14.9	15.6	15.3	16.0	16.4	
	12H	14.4	15.0	14.8	15.4	15.8	15.0	15.6	15.4	16.0	16.4	
8H	4H	14.3	15.0	14.7	15.4	15.8	14.7	15.4	15.1	15.8	16.2	
6H	14.5	15.0	14.9	15.5	15.9	14.9	15.5	15.4	15.9	16.3		
8H	14.5	15.0	15.0	15.4	15.9	15.0	15.5	15.5	16.0	16.4		
12H	14.5	15.0	15.0	15.4	15.9	15.1	15.6	15.6	16.0	16.5		
12H	4H	14.3	14.9	14.7	15.3	15.7	14.7	15.3	15.1	15.7	16.1	
6H	14.5	15.0	15.0	15.4	15.9	14.9	15.4	15.4	15.8	16.3		
8H	14.5	15.0	15.0	15.4	15.9	15.1	15.5	15.5	15.9	16.4		
不同间隔布灯时,观察者位置引起的UGR变化(CIE Pub.117):												
S = 1.0H		+ 1.0 / - 1.4					+ 1.0 / - 1.5					
1.5H		+ 1.2 / - 1.1					+ 1.4 / - 1.1					
2.0H		+ 1.8 / - 1.7					+ 2.2 / - 1.8					

依据CIE Pub.117计算, 15308lm光源光通表格中的数据需要进行修正 ($81\log(F/F_0) = 9.5$).

出光口面积: 0.1 m²

C角度范围: 0度 - 360度
 C角度间隔: 22.5度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: DAMIN
 测试日期: 2023-10-14

γ角度范围: 0度 - 180度
 γ角度间隔: 5.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
 环境湿度: 65.0%
 测试距离: 9.401米 [K=1.0000]
 备注:

UF利用系数表

实测参数: U:220.15V I:0.4599A P:98.292W PF:0.9707 Freq:50.00Hz 实检光通: 15308.3x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	72	63	57	71	63	57	70	62	57	52
0.80	81	72	67	80	72	67	79	71	66	61
1.00	88	80	75	87	79	74	85	80	74	68
1.25	94	86	81	93	86	81	90	84	80	74
1.50	98	91	86	96	90	85	94	88	84	78
2.00	103	97	92	101	95	91	98	93	90	83
2.50	105	100	95	103	98	94	100	96	92	85
3.00	108	103	99	106	101	98	102	98	95	88
4.00	110	106	103	108	105	102	104	101	99	91
5.00	112	109	106	110	107	104	105	103	101	92
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:220.15V I:0.4599A P:98.292W PF:0.9707 Freq:50.00Hz 实检光通: 15308.3x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

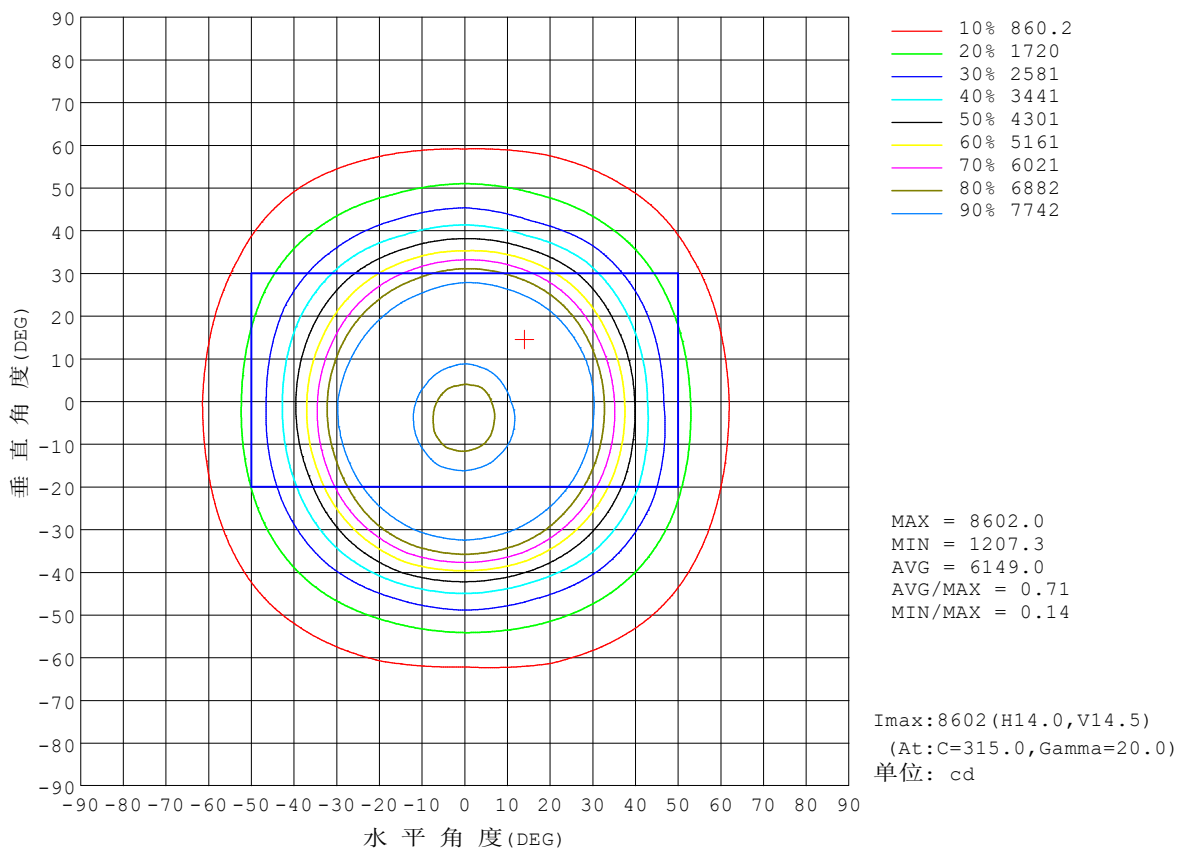


C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

灯具有效平均照度图

实测参数: U:220.15V I:0.4599A P:98.292W PF:0.9707 Freq:50.00Hz 实检光通: 15308.3x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

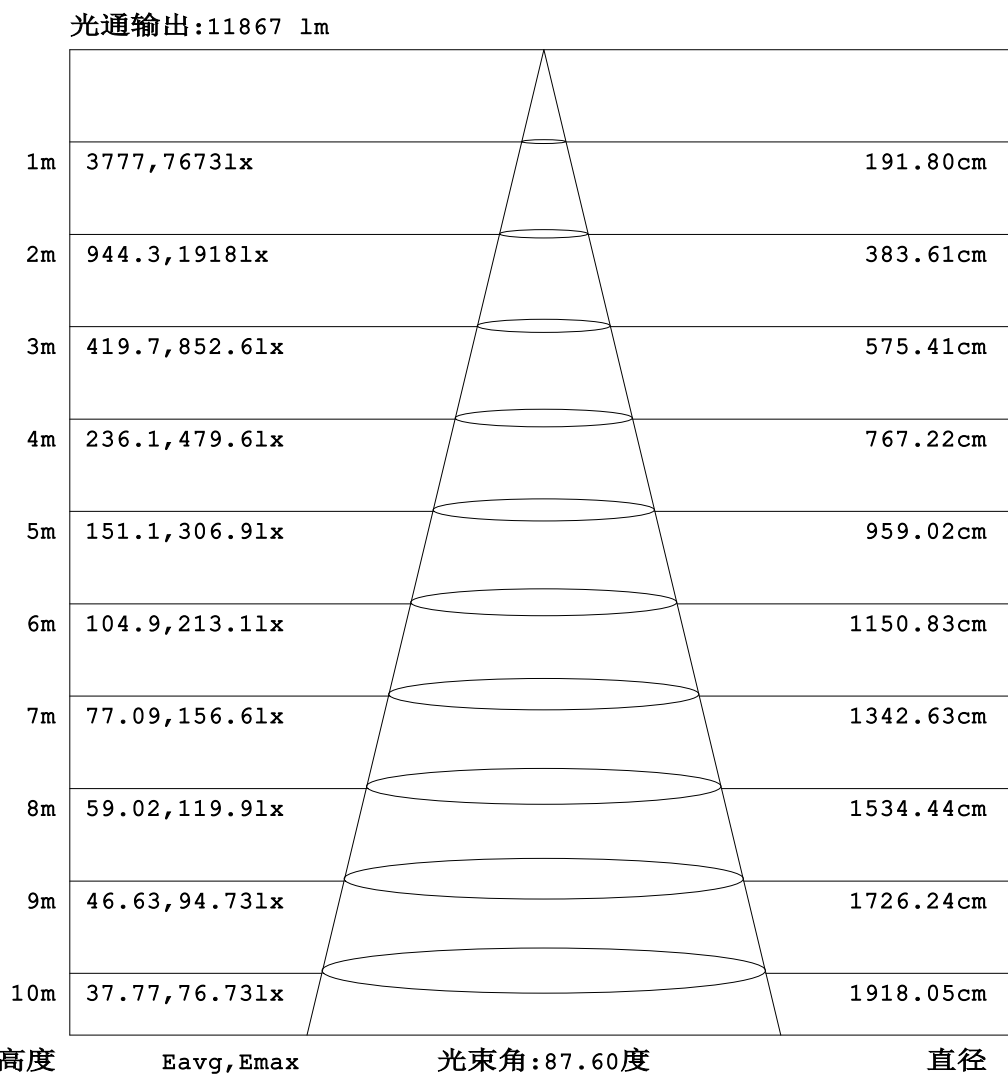


注:曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

Y角度范围: 0度 - 180度
Y角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:220.15V I:0.4599A P:98.292W PF:0.9707 Freq:50.00Hz 实检光通: 15308.3x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

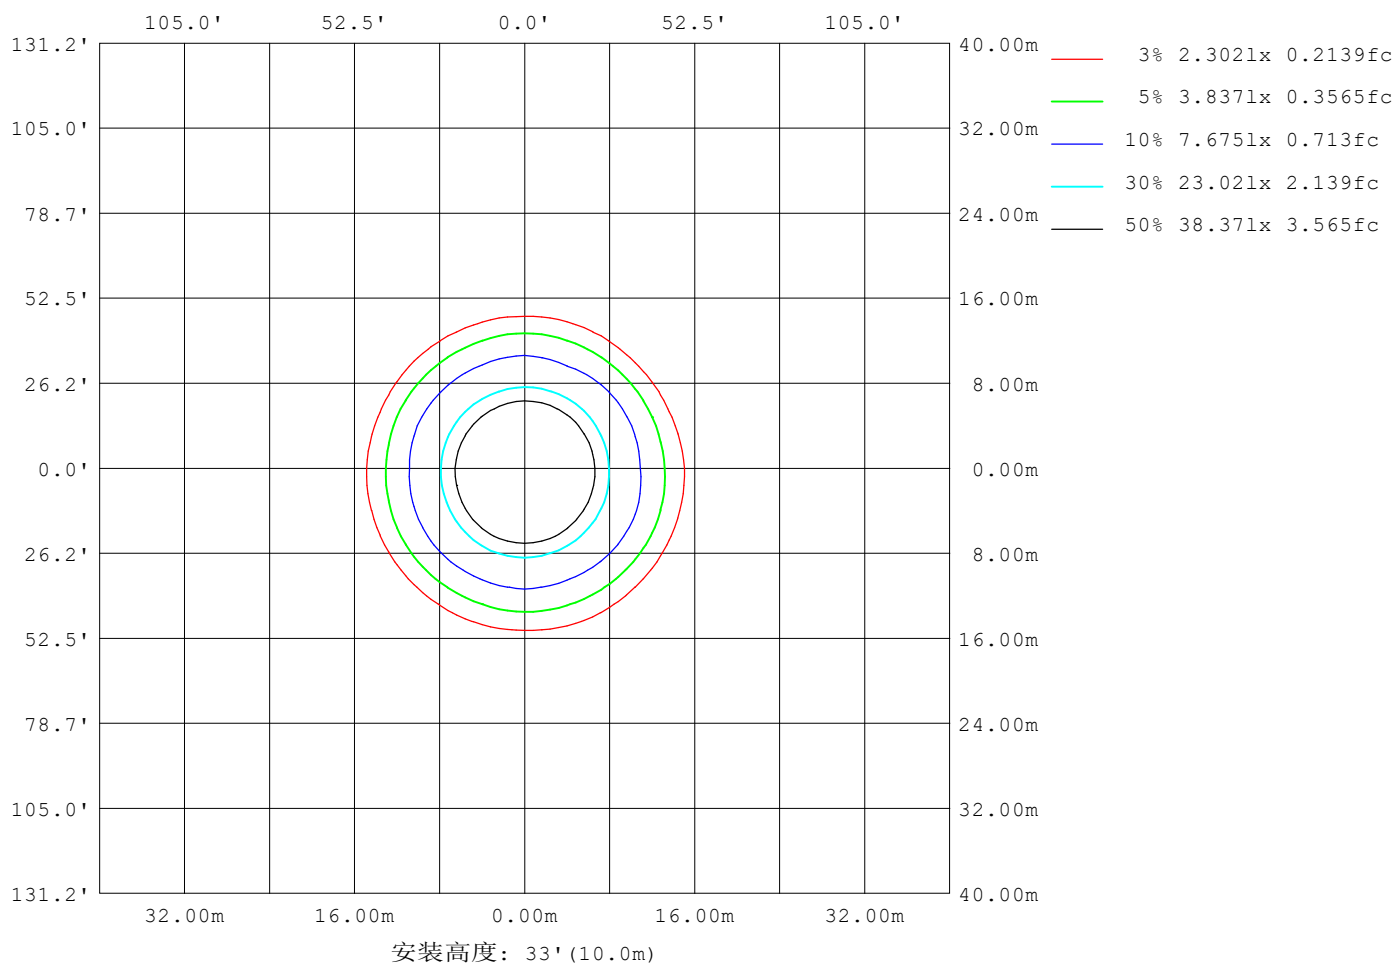

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

Y角度范围: 0度 - 180度
Y角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:220.15V I:0.4599A P:98.292W PF:0.9707 Freq:50.00Hz 实检光通: 15308.3x1 lm		
灯具名称: 710	灯具类型:UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	14903
L横 (75) av	9982
L横 (85) av	6750
L纵 (65) av	13453
L纵 (75) av	8897
L纵 (85) av	6758
L45 (65) av	14273
L45 (75) av	9314
L45 (85) av	6788

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度:25.3℃
测试人员:DAMIN
测试日期:2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度:65.0%
测试距离:9.401米 [K=1.0000]
备注:

平面照度曲线

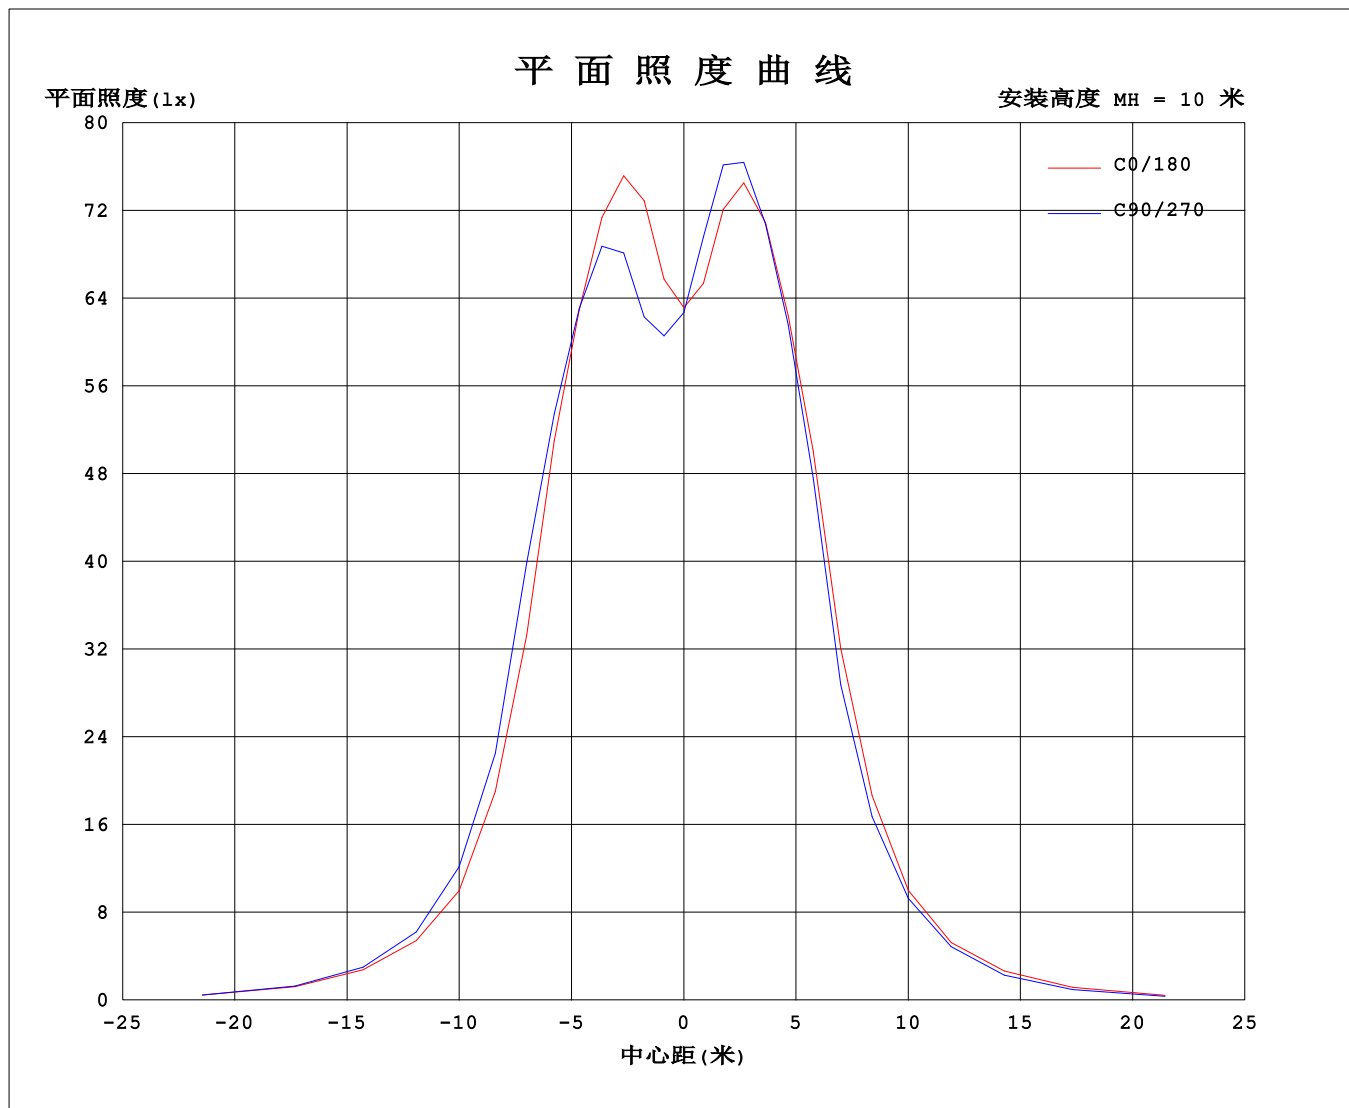

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:220.15V I:0.4599A P:98.292W PF:0.9707 Freq:50.00Hz 实检光通: 15308.3x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

表--1

单位: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	6283	6283	6283	6283	6283	6283	6283	6283	6283	6283	6283	6283	6283	6283	6283	6283			
5	6616	6418	6289	6177	6138	6144	6239	6388	6577	6791	6928	7036	7054	7031	6925	6805			
10	7592	7279	6975	6673	6535	6561	6889	7257	7510	7737	7889	7983	7989	7995	7912	7800			
15	8296	8099	7851	7655	7576	7578	7831	8118	8228	8301	8426	8482	8492	8525	8510	8411			
20	8556	8459	8331	8296	8302	8302	8349	8474	8500	8425	8501	8523	8542	8602	8631	8552			
25	8409	8394	8385	8445	8487	8487	8394	8362	8339	8240	8212	8193	8286	8314	8384	8367			
30	7810	7943	8075	8172	8247	8213	8073	7849	7667	7412	7187	7119	7343	7365	7568	7712			
35	6023	6374	6722	7109	7271	7123	6741	6204	5803	5485	5370	5260	5243	5418	5607	5725			
40	4214	4552	4783	5013	5020	5081	4680	4290	4130	4041	3946	3677	3733	3693	4018	4028			
45	2816	3337	3445	3323	3449	3383	3280	3058	2823	2865	2664	2561	2637	2463	2745	2856			
50	2041	2292	2329	2258	2346	2192	2222	2152	1971	1982	1849	1782	1848	1793	1851	1964			
55	1474	1554	1587	1623	1600	1562	1525	1476	1411	1315	1275	1227	1214	1242	1244	1328			
60	992	1009	1057	1107	1033	1063	998	970	952	843	849	820	784	833	824	872			
65	645	642	685	731	645	685	644	622	615	532	549	529	492	539	534	564			
70	422	411	436	468	413	439	419	405	404	329	337	322	301	326	321	348			
75	259	251	269	288	259	271	261	256	257	218	224	208	202	209	211	221			
80	149	152	164	179	170	169	161	157	151	133	127	119	117	118	120	131			
85	55.0	62.7	78.1	92.0	88.9	89.9	82.2	71.7	62.6	43.9	37.1	29.4	28.9	29.8	39.3	45.9			
90	3.19	3.10	3.09	5.22	5.47	4.40	3.15	3.15	3.88	4.05	4.19	4.18	4.20	4.09	4.06	3.96			
95	4.27	4.16	3.97	3.91	3.87	3.90	4.02	4.22	5.28	5.62	5.83	5.82	5.84	5.75	5.63	5.43			
100	6.00	5.77	5.56	5.42	5.38	5.40	5.67	5.86	7.39	7.87	8.16	8.30	8.29	8.21	7.96	7.64			
105	8.47	8.12	7.87	7.61	7.60	7.66	8.00	8.25	10.4	11.0	11.4	11.8	11.8	11.7	11.2	10.7			
110	11.8	11.3	11.0	10.6	10.7	10.8	11.2	11.6	14.5	15.2	15.6	16.1	16.2	16.0	15.4	14.8			
115	16.0	15.3	14.9	14.6	14.7	14.8	15.3	15.7	19.2	20.0	20.5	21.1	21.2	21.0	20.3	19.6			
120	20.7	19.9	19.5	19.1	19.4	19.4	20.0	20.4	24.4	25.2	25.7	26.3	26.4	26.1	25.4	24.7			
125	25.7	24.8	24.4	24.0	24.3	24.3	24.9	25.3	29.5	30.3	30.8	31.3	31.4	31.1	30.4	29.7			
130	30.6	29.6	29.3	29.0	29.3	29.3	29.8	30.3	34.5	35.1	35.6	36.1	36.2	35.8	35.1	34.5			
135	35.2	34.3	34.0	33.8	34.0	34.0	34.4	34.8	39.1	39.5	39.9	40.3	40.4	40.0	39.4	38.8			
140	39.2	38.4	38.0	38.0	38.2	38.2	38.3	38.7	42.9	43.3	43.6	44.0	44.0	43.7	43.0	42.5			
145	42.8	42.0	41.7	41.7	41.7	41.7	41.6	42.1	46.4	46.7	46.9	47.4	47.4	47.2	46.5	46.0			
150	46.5	45.4	45.1	45.1	45.0	44.8	44.9	45.3	49.8	50.2	50.5	50.8	50.9	50.7	50.1	49.6			
155	50.3	49.2	48.8	48.7	48.5	48.2	48.5	49.0	53.3	54.0	54.5	54.5	54.5	54.5	53.8	53.3			
160	54.6	53.4	53.1	52.8	52.4	51.9	52.7	53.3	57.4	58.3	59.0	58.8	58.8	58.7	58.2	57.4			
165	60.0	58.7	58.0	57.5	57.3	56.9	57.7	58.8	62.4	63.5	63.9	64.0	64.2	64.0	63.4	62.8			
170	65.7	64.4	63.8	63.4	63.1	62.9	63.8	64.9	67.5	68.6	68.9	68.9	69.4	69.4	68.9	68.2			
175	70.3	69.6	69.6	69.0	68.9	69.0	69.8	70.2	71.3	72.0	72.7	72.4	72.8	72.8	72.9	72.2			
180	72.8	72.9	73.1	72.9	73.0	73.1	73.4	73.3	73.0	72.8	73.2	72.9	73.1	73.0	73.5	73.2			

C角度范围: 0度 - 360度

C角度间隔: 22.5度

测试速度: 快速

环境温度: 25.3℃

测试人员: DAMIN

测试日期: 2023-10-14

γ角度范围: 0度 - 180度

γ角度间隔: 5.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473

环境湿度: 65.0%

测试距离: 9.401米 [K=1.0000]

备注: