


室内灯具光度数据


实测参数: U:220.12V I:0.6772A P:146.28W PF:0.9814 Freq:50.00Hz 实检光通: 22355.6x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

光源数据		光度数据				光效: 152.82 lm/W
型号	俄罗斯GGL-710-150W	峰值光强(cd)	12495	S/MH(C0/180)	1.28	
标称功率(W)	150	灯具效率(%)	100.0	S/MH(C90/270)	1.17	
额定电源电压(V)	220	总光通量(lm)	22356	η UP,DN(C0-180)	0.5,50.4	
额定光通量(lm)	22355.6	CIE分类	直接	η UP,DN(C180-360)	0.6,48.5	
灯具内光源数(只)	1	上射光通比(%)	1.1	CIBSE SHR NOM	1.00	
实测电源电压(V)	219.5	下射光通比(%)	98.9	CIBSE SHR MAX	1.15	

室内灯具配光曲线

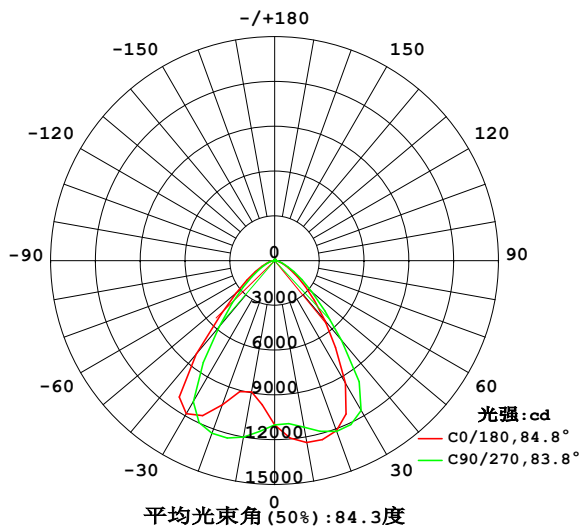

空间等照度曲线(单位:lx)

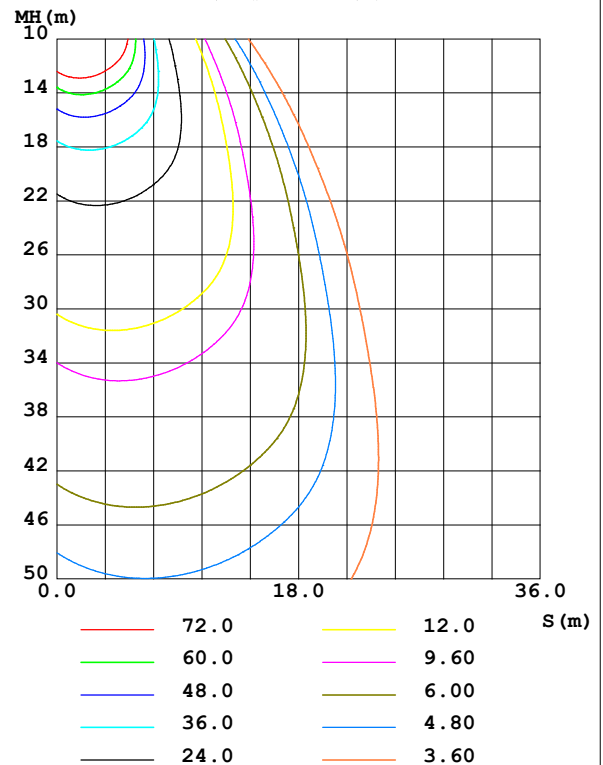

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

Y角度范围: 0度 - 180度
Y角度间隔: 5.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
10	1236	1216	1133	956.4	893.3	1063	1201	1238	0- 10	1057	1057	4.73, 4.73
20	1213	1225	1217	1092	1027	1182	1231	1225	10- 20	3253	4310	19.3, 19.3
30	947.5	1052	1159	1184	1185	1175	1092	984.4	20- 30	5338	9648	43.2, 43.2
40	524.1	579.7	699.1	829.4	818.9	696.0	576.8	529.7	30- 40	5596	15244	68.2, 68.2
50	270.7	293.4	322.8	348.2	337.1	297.9	276.1	268.5	40- 50	3550	18795	84.1, 84.1
60	125.8	136.1	149.5	157.9	148.7	132.0	123.0	122.3	50- 60	1903	20697	92.6, 92.6
70	52.58	58.77	60.70	63.51	60.21	53.26	49.24	48.92	60- 70	918.1	21616	96.7, 96.7
80	20.86	23.04	23.74	24.24	22.73	20.18	18.37	18.46	70- 80	392.3	22008	98.4, 98.4
90	0.4945	0.4729	0.6842	0.4559	0.5312	0.5610	0.5942	0.6137	80- 90	112.2	22120	98.9, 98.9
100	0.9850	0.8865	0.8197	0.8000	0.9745	1.052	1.164	1.253	90-100	8.101	22128	99, 99
110	2.036	1.840	1.638	1.546	1.821	1.994	2.265	2.468	100-110	15.24	22143	99.1, 99.1
120	3.405	3.189	2.909	2.730	3.116	3.354	3.719	3.929	110-120	25.87	22169	99.2, 99.2
130	4.735	4.580	4.356	4.145	4.581	4.829	5.178	5.266	120-130	35.85	22205	99.3, 99.3
140	5.851	5.704	5.638	5.476	5.925	6.111	6.345	6.373	130-140	41.20	22246	99.5, 99.5
150	6.972	6.669	6.616	6.504	6.971	7.071	7.311	7.419	140-150	40.36	22287	99.7, 99.7
160	8.254	7.917	7.705	7.550	7.958	8.148	8.459	8.744	150-160	34.57	22321	99.8, 99.8
170	9.904	9.587	9.220	9.012	9.323	9.531	9.875	10.25	160-170	24.86	22346	100, 100
180	10.50	10.54	10.48	10.57	10.49	10.54	10.47	10.57	170-180	9.567	22356	100, 100
单位:°	光强:×10cd									单位:lm		

锥面光通量(90度): 17285 lm

%lum = 77.3%

%lamp = 77.3%

锥面光通量(130度): 21248 lm

%lum = 95.0%


%lamp = 95.0%

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ 角度范围: 0度 - 180度
 γ 角度间隔: 5.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

灯具亮度限制曲线

实测参数：U:220.12V I:0.6772A P:146.28W PF:0.9814 Freq:50.00Hz 实检光通：22355.6x1 lm		
灯具名称：710	灯具类型：UFO	灯具重量：
灯具规格：	外型尺寸：	测试编号：
制造厂商：EVERFINE	发光口面：0.1	遮光角：

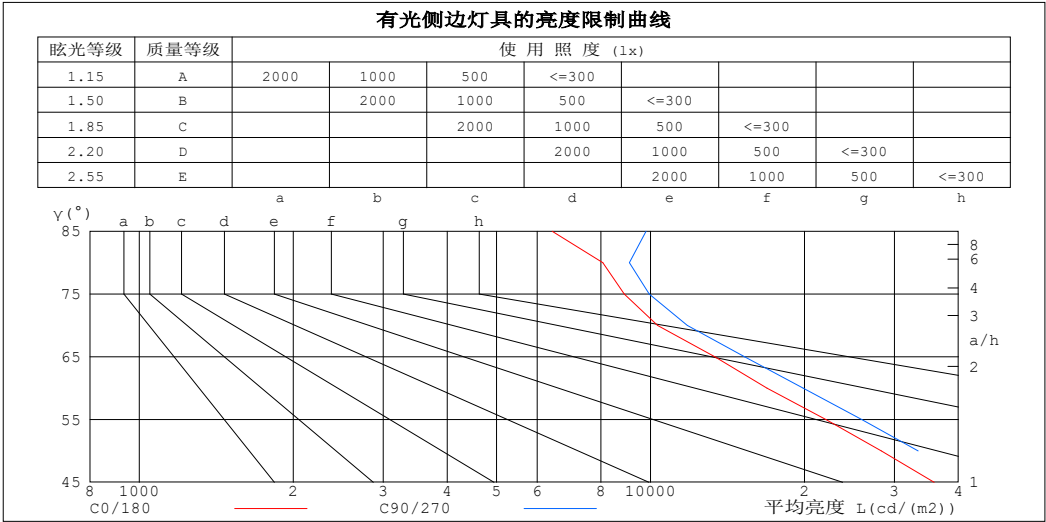

平均亮度值 cd/(m2)		
γ (°)	C0/180	C90/270
85	6424	9797
80	8068	9086
75	8882	9941
70	10324	11796
65	13365	15286
60	16891	19876
55	22020	25906
50	28283	33378
45	35854	44735


C角度范围： 0度 - 360度
C角度间隔： 22.5度
测试速度： 快速
环境温度:25.3℃
测试人员:DAMIN
测试日期:2023-10-14

γ角度范围： 0度 - 180度
γ角度间隔： 5.0度
测试系统： 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度:65.0%
测试距离:9.401米 [K=1.0000]
备注：

工作面利用系数和灯具概算曲线

实测参数: U:220.12V I:0.6772A P:146.28W PF:0.9814 Freq:50.00Hz		
实检光通: 22355.6x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.08	1.04	1.02	1.05	1.02	.00	1.01	.99	.96	.97	.95	.93	.93	.92	.90	.88
2.0	.97	.92	.87	.95	.90	.86	.92	.88	.84	.88	.85	.82	.85	.83	.80	.78
3.0	.88	.81	.76	.86	.80	.76	.83	.78	.74	.81	.76	.73	.78	.75	.72	.70
4.0	.80	.73	.67	.79	.72	.67	.76	.70	.66	.74	.69	.65	.72	.68	.64	.62
5.0	.73	.65	.60	.72	.65	.60	.70	.64	.59	.68	.62	.58	.66	.61	.58	.56
6.0	.67	.59	.54	.66	.59	.53	.64	.58	.53	.62	.57	.52	.61	.56	.52	.50
7.0	.61	.54	.48	.61	.53	.48	.59	.53	.48	.58	.52	.48	.56	.51	.47	.45
8.0	.57	.49	.44	.56	.49	.44	.55	.48	.44	.53	.48	.43	.52	.47	.43	.41
9.0	.52	.45	.40	.52	.45	.40	.51	.44	.40	.50	.44	.40	.49	.43	.39	.38
10.0	.49	.42	.37	.48	.41	.37	.47	.41	.37	.46	.40	.36	.45	.40	.36	.35

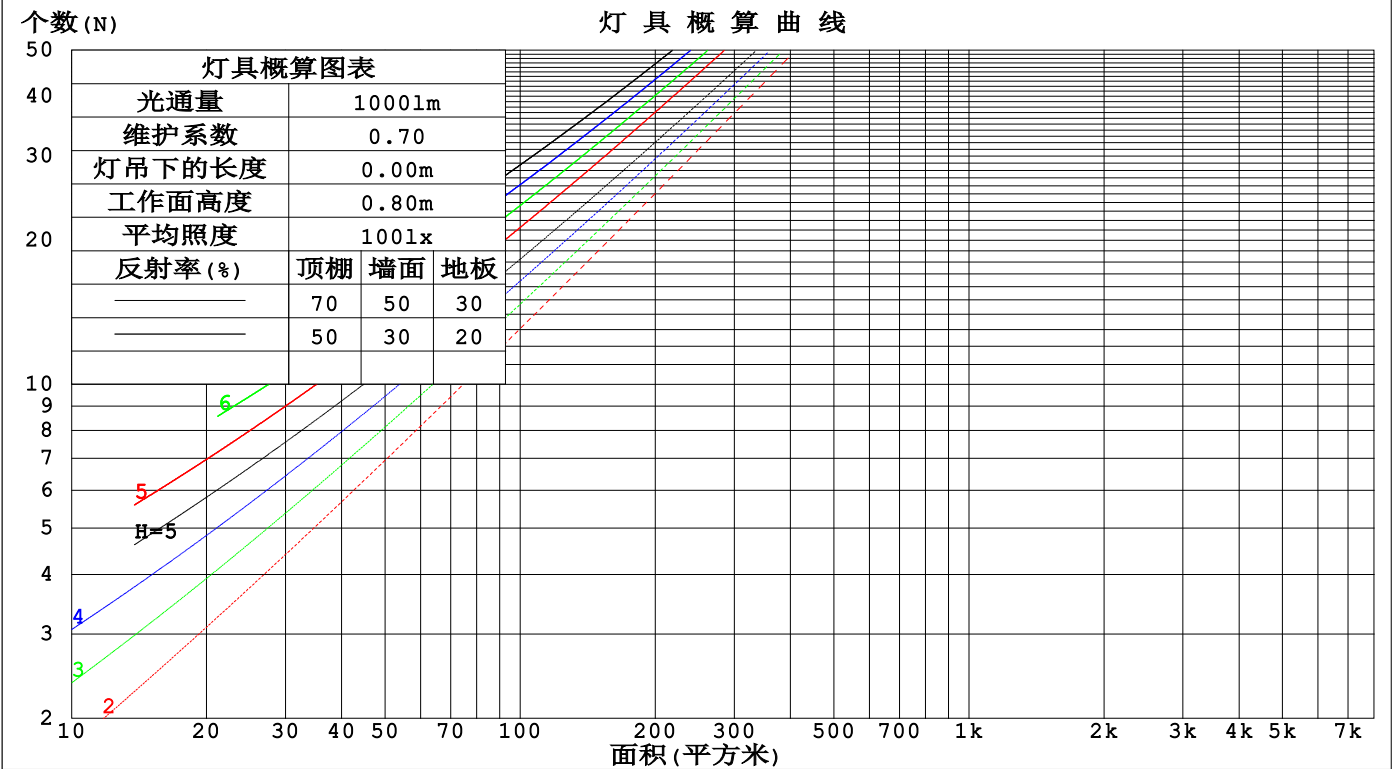

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:220.12V I:0.6772A P:146.28W PF:0.9814 Freq:50.00Hz 实检光通: 22355.6x1 lm					
灯具名称: 710		灯具类型: UFO		灯具重量:	
灯具规格:		外型尺寸:		测试编号:	
制造厂商: EVERFINE		发光口面: 0.1		遮光角:	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.233	.132	.042	.225	.129	.041	.212	.122	.039	.199	.115	.037	.188	.109	.035	
2.0	.224	.123	.038	.218	.120	.037	.207	.115	.036	.196	.110	.034	.186	.105	.033	
3.0	.213	.113	.034	.208	.111	.033	.198	.107	.033	.188	.103	.032	.179	.099	.031	
4.0	.201	.105	.031	.197	.103	.030	.188	.100	.030	.179	.096	.029	.172	.093	.028	
5.0	.190	.097	.028	.186	.096	.028	.178	.093	.027	.171	.090	.027	.164	.088	.026	
6.0	.180	.090	.026	.176	.089	.026	.169	.087	.025	.162	.084	.025	.156	.082	.024	
7.0	.170	.084	.024	.167	.083	.024	.160	.081	.023	.154	.079	.023	.149	.077	.023	
8.0	.161	.079	.022	.158	.078	.022	.152	.076	.022	.147	.075	.021	.142	.073	.021	
9.0	.153	.074	.021	.150	.073	.021	.145	.072	.020	.140	.070	.020	.136	.069	.020	
10.0	.145	.070	.019	.143	.069	.019	.138	.068	.019	.134	.066	.019	.130	.065	.019	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.199	.199	.199	.170	.170	.170	.116	.116	.116	.067	.067	.067	.021	.021	.021	
1.0	.183	.165	.149	.157	.142	.128	.107	.097	.088	.062	.056	.051	.020	.018	.017	
2.0	.171	.140	.114	.147	.121	.099	.101	.084	.069	.058	.049	.040	.019	.016	.013	
3.0	.162	.122	.091	.139	.105	.078	.095	.073	.055	.055	.043	.032	.018	.014	.011	
4.0	.153	.108	.074	.132	.093	.064	.090	.065	.045	.052	.038	.027	.017	.012	.009	
5.0	.146	.097	.061	.125	.084	.053	.086	.059	.038	.050	.035	.022	.016	.011	.007	
6.0	.139	.089	.052	.120	.077	.046	.082	.054	.032	.048	.032	.019	.015	.010	.006	
7.0	.133	.081	.045	.114	.071	.040	.079	.050	.028	.046	.029	.017	.015	.010	.006	
8.0	.127	.076	.040	.109	.066	.035	.076	.046	.025	.044	.027	.015	.014	.009	.005	
9.0	.122	.071	.036	.105	.061	.031	.073	.043	.022	.042	.025	.013	.014	.008	.004	
10.0	.117	.066	.033	.101	.058	.029	.070	.041	.020	.041	.024	.012	.013	.008	.004	

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:220.12V I:0.6772A P:146.28W PF:0.9814 Freq:50.00Hz 实检光通: 22355.6x1 lm										
灯具名称: 710			灯具类型: UFO			灯具重量:				
灯具规格:			外型尺寸:			测试编号:				
制造厂商: EVERFINE			发光口面: 0.1			遮光角:				
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	横向 (Viewed crosswise)					纵向 (Viewed endwise)				
x = 2H y = 2H	11.3	12.6	11.6	12.8	13.0	12.1	13.4	12.4	13.6	13.8
3H	11.6	12.7	11.9	13.0	13.2	12.4	13.5	12.7	13.8	14.0
4H	11.7	12.8	12.0	13.0	13.3	12.5	13.6	12.8	13.8	14.1
6H	11.8	12.8	12.1	13.0	13.3	12.5	13.5	12.9	13.8	14.1
8H	11.7	12.7	12.1	13.0	13.3	12.6	13.5	12.9	13.8	14.1
12H	11.7	12.7	12.1	13.0	13.3	12.6	13.5	12.9	13.8	14.1
4H 2H	11.4	12.5	11.7	12.8	13.0	12.2	13.2	12.5	13.5	13.8
3H	11.8	12.8	12.2	13.1	13.4	12.5	13.5	12.9	13.8	14.1
4H	12.0	12.9	12.4	13.2	13.5	12.7	13.5	13.1	13.9	14.2
6H	12.2	12.9	12.6	13.3	13.6	12.9	13.6	13.3	13.9	14.3
8H	12.2	12.9	12.6	13.2	13.6	12.9	13.6	13.3	14.0	14.4
12H	12.2	12.8	12.6	13.2	13.6	13.0	13.6	13.4	14.0	14.4
8H 4H	12.0	12.7	12.5	13.1	13.5	12.7	13.4	13.1	13.8	14.2
6H	12.3	12.8	12.7	13.2	13.7	12.9	13.5	13.4	13.9	14.3
8H	12.3	12.8	12.8	13.3	13.7	13.1	13.6	13.5	14.0	14.5
12H	12.4	12.8	12.9	13.3	13.8	13.2	13.6	13.7	14.0	14.5
12H 4H	12.0	12.6	12.5	13.0	13.5	12.7	13.3	13.1	13.7	14.1
6H	12.3	12.8	12.7	13.2	13.7	12.9	13.4	13.4	13.9	14.3
8H	12.4	12.8	12.9	13.3	13.7	13.1	13.5	13.6	14.0	14.5
不同间隔布灯时, 观察者位置引起的UGR变化 (CIE Pub.117):										
S = 1.0H	+ 0.9 / - 1.3					+ 1.0 / - 1.3				
1.5H	+ 1.0 / - 0.9					+ 1.6 / - 1.1				
2.0H	+ 1.6 / - 1.5					+ 2.3 / - 1.5				

依据CIE Pub.117计算, 22356lm光源光通表格中的数据需要进行修正 ($81\log(F/F_0) = 10.8$)。
 出光口面积: 0.15 m²

C角度范围: 0度 - 360度
 C角度间隔: 22.5度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: DAMIN
 测试日期: 2023-10-14

γ角度范围: 0度 - 180度
 γ角度间隔: 5.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
 环境湿度: 65.0%
 测试距离: 9.401米 [K=1.0000]
 备注:

UF利用系数表

实测参数: U:220.12V I:0.6772A P:146.28W PF:0.9814 Freq:50.00Hz 实检光通: 22355.6x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	71	62	57	71	62	57	70	62	57	52
0.80	81	72	67	80	72	66	78	71	66	61
1.00	88	80	74	87	79	74	85	80	74	68
1.25	94	86	81	92	86	81	90	84	80	74
1.50	98	91	86	96	90	85	93	88	84	78
2.00	103	96	92	101	95	91	98	93	89	83
2.50	105	100	95	103	98	94	100	96	92	85
3.00	107	103	99	105	101	98	102	98	95	88
4.00	110	106	103	108	104	101	104	101	99	90
5.00	112	108	106	110	107	104	105	103	101	92
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:220.12V I:0.6772A P:146.28W PF:0.9814 Freq:50.00Hz 实检光通: 22355.6x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

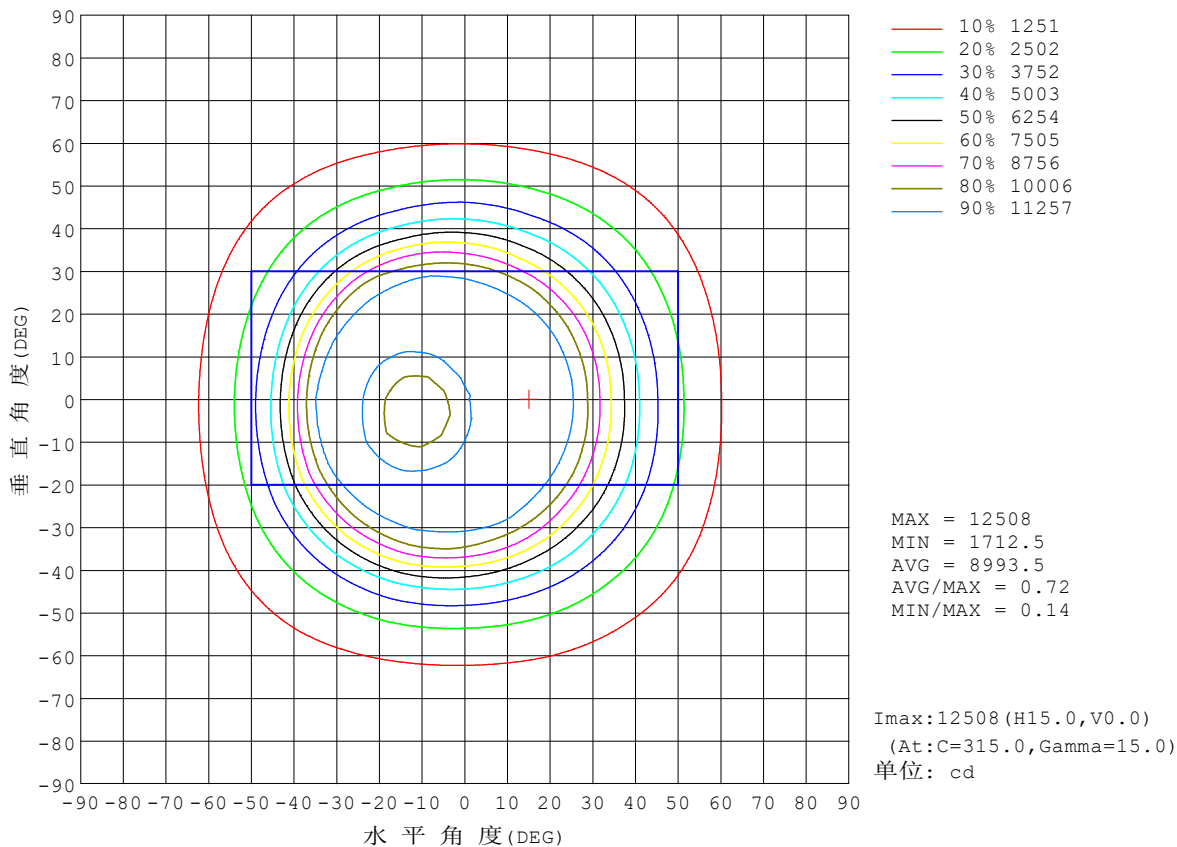


C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:220.12V I:0.6772A P:146.28W PF:0.9814 Freq:50.00Hz 实检光通: 22355.6x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

光通输出:17285 lm

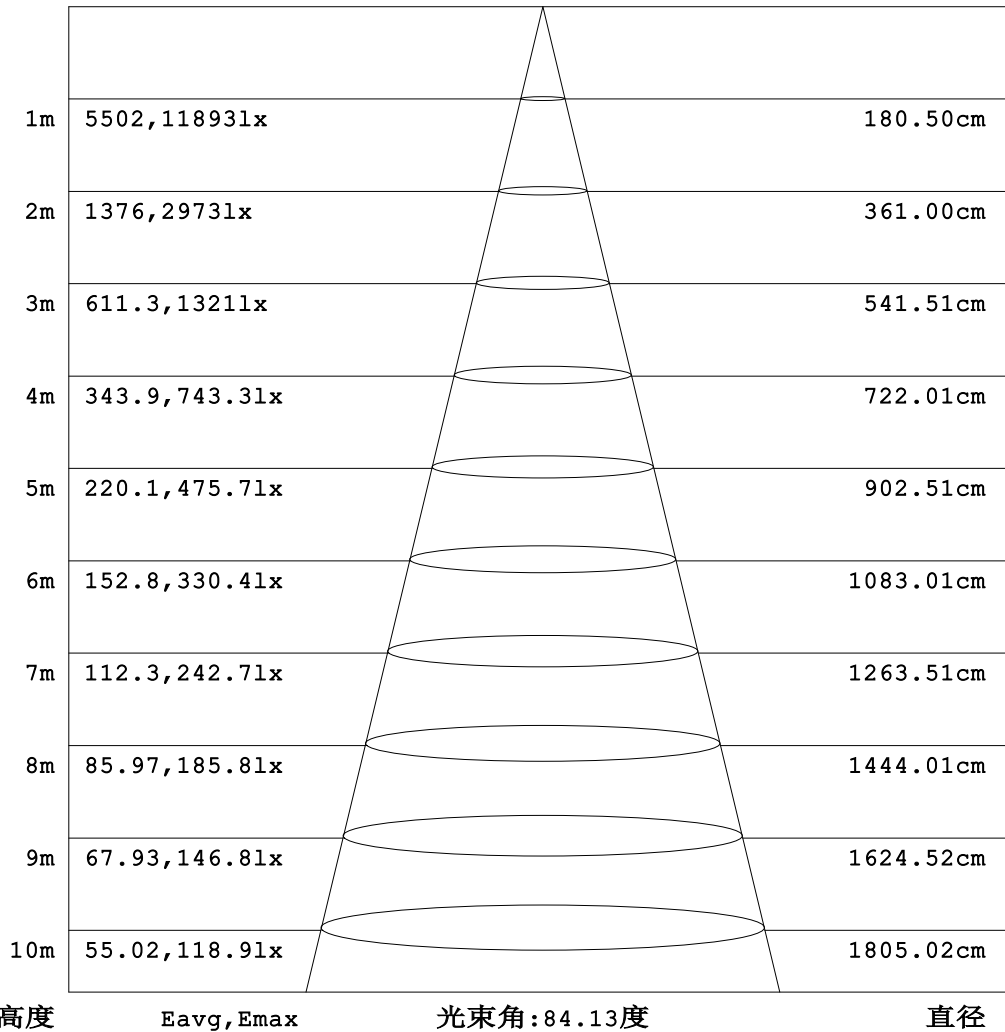


注:曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
 C角度间隔: 22.5度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: DAMIN
 测试日期: 2023-10-14

γ角度范围: 0度 - 180度
 γ角度间隔: 5.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
 环境湿度: 65.0%
 测试距离: 9.401米 [K=1.0000]
 备注:

平面等照度曲线

实测参数: U:220.12V I:0.6772A P:146.28W PF:0.9814 Freq:50.00Hz 实检光通: 22355.6x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

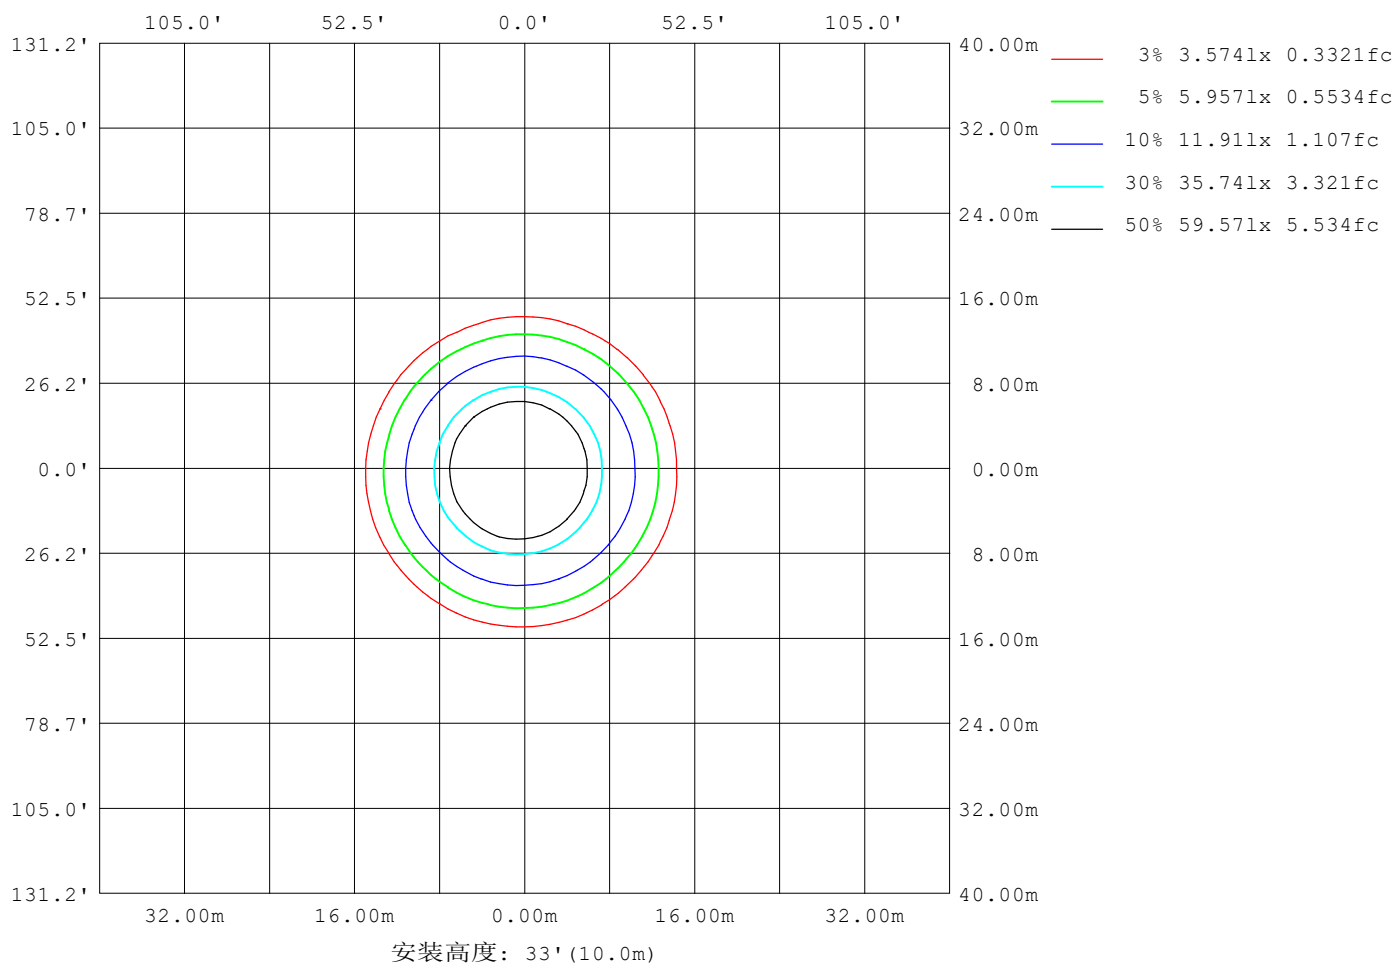

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

Y角度范围: 0度 - 180度
Y角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:220.12V I:0.6772A P:146.28W PF:0.9814 Freq:50.00Hz 实检光通: 22355.6x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	14220
L横 (75) av	9347
L横 (85) av	7131
L纵 (65) av	13885
L纵 (75) av	8990
L纵 (85) av	7485
L45 (65) av	14098
L45 (75) av	9187
L45 (85) av	7385

注: 依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

平面照度曲线

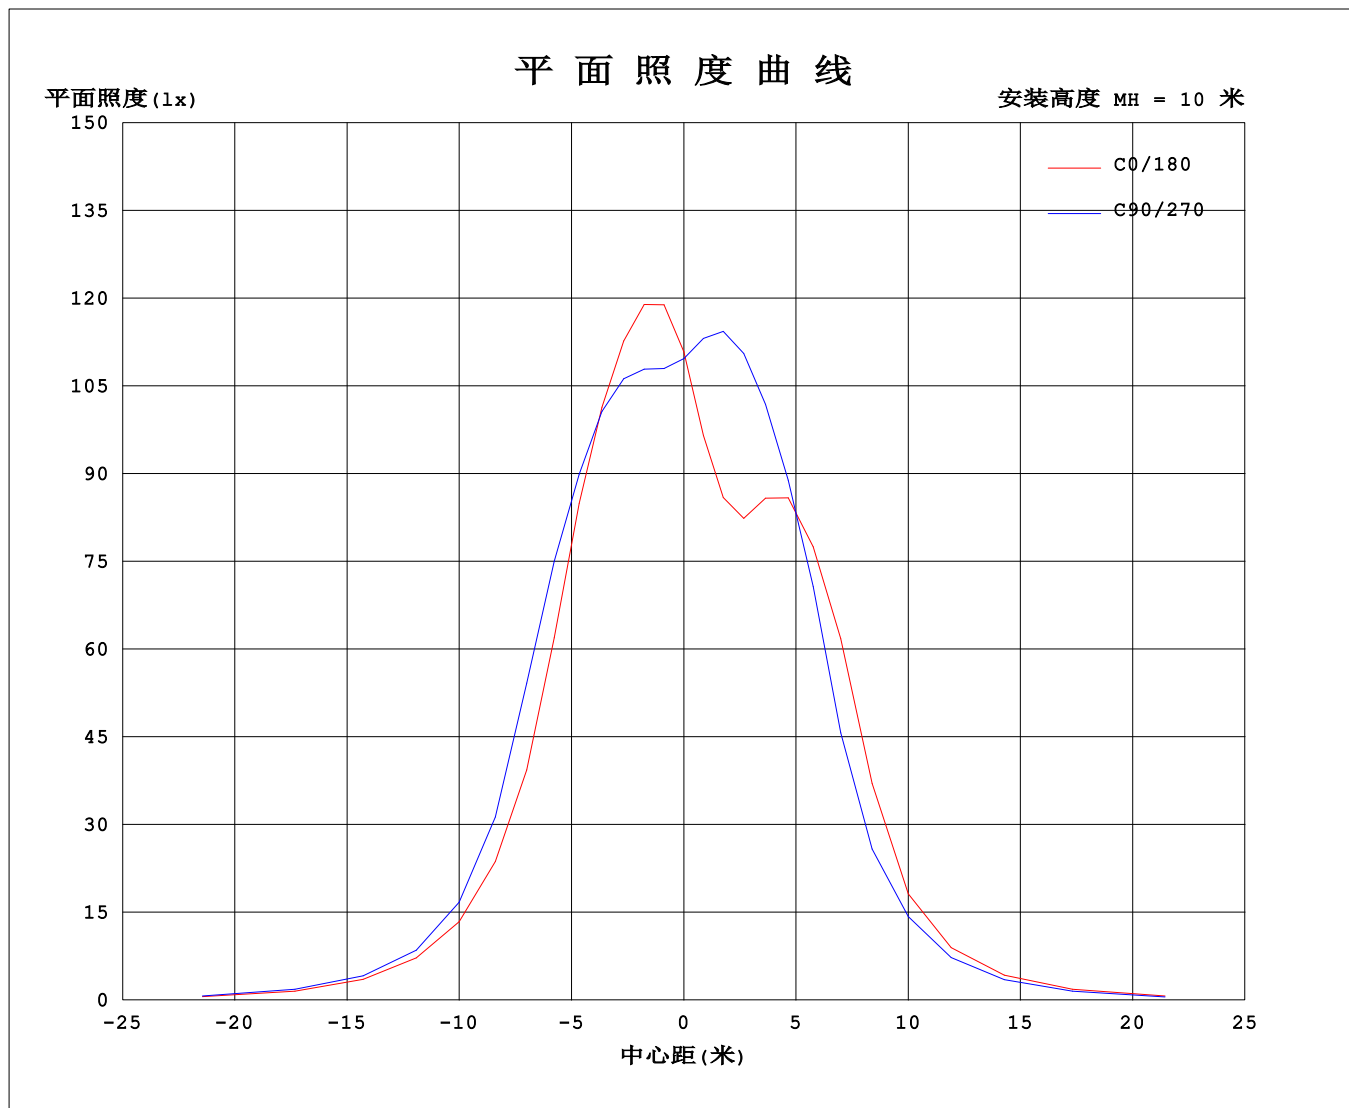

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

Y角度范围: 0度 - 180度
Y角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:220.12V I:0.6772A P:146.28W PF:0.9814 Freq:50.00Hz 实检光通: 22355.6x1 lm																	
灯具名称: 710									灯具类型: UFO						灯具重量:		
灯具规格:									外型尺寸:						测试编号:		
制造厂商: EVERFINE									发光口面: 0.1						遮光角:		

表--1

单位: ×10cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100			
5	1194	1186	1167	1137	1096	1044	999	974	970	1001	1054	1107	1148	1175	1189	1193			
10	1236	1232	1216	1185	1133	1045	956	898	893	959	1063	1150	1201	1226	1238	1238			
15	1242	1242	1235	1221	1183	1102	994	899	907	1010	1120	1194	1231	1243	1250	1244			
20	1213	1221	1225	1230	1217	1170	1092	1003	1027	1104	1182	1220	1231	1227	1225	1216			
25	1133	1154	1178	1204	1212	1202	1170	1127	1146	1179	1205	1207	1198	1172	1155	1138			
30	948	993	1052	1118	1159	1183	1184	1175	1185	1189	1175	1140	1092	1024	984	962			
35	711	754	810	904	990	1072	1110	1129	1117	1089	1026	924	834	758	729	719			
40	524	555	580	635	699	778	829	866	819	769	696	619	577	543	530	523			
45	378	403	420	445	476	512	530	544	511	482	444	413	406	381	378	375			
50	271	286	293	311	323	344	348	356	337	317	298	282	276	270	269	271			
55	188	199	206	218	224	234	235	234	225	211	201	188	188	181	185	186			
60	126	134	136	147	150	154	158	156	149	140	132	125	123	121	122	123			
65	84.1	88.3	90.6	95.6	97.2	100	103	101	96.2	90.3	84.2	80.5	78.8	77.3	79.9	81.2			
70	52.6	56.9	58.8	60.8	60.7	62.2	63.5	61.7	60.2	55.9	53.3	49.8	49.2	48.3	48.9	51.6			
75	34.2	36.7	37.1	39.0	38.7	39.9	40.4	39.7	38.3	35.8	33.8	32.3	31.1	30.2	31.3	31.8			
80	20.9	21.9	23.0	23.8	23.7	24.6	24.2	23.8	22.7	21.5	20.2	19.3	18.4	18.0	18.5	19.3			
85	8.34	9.91	11.4	12.5	12.8	12.9	12.0	10.8	10.3	9.20	8.53	7.21	6.72	6.41	6.67	7.40			
90	0.49	0.47	0.47	0.62	0.68	0.72	0.46	0.44	0.53	0.55	0.56	0.58	0.59	0.61	0.61	0.61			
95	0.68	0.65	0.62	0.60	0.59	0.58	0.58	0.58	0.71	0.74	0.76	0.80	0.82	0.85	0.86	0.87			
100	0.98	0.93	0.89	0.84	0.82	0.80	0.80	0.80	0.97	1.02	1.05	1.11	1.16	1.23	1.25	1.27			
105	1.44	1.36	1.29	1.20	1.16	1.12	1.12	1.11	1.34	1.40	1.46	1.56	1.64	1.75	1.80	1.83			
110	2.04	1.94	1.84	1.71	1.64	1.56	1.55	1.53	1.82	1.91	1.99	2.13	2.26	2.39	2.47	2.51			
115	2.70	2.61	2.48	2.34	2.23	2.12	2.10	2.07	2.43	2.53	2.64	2.82	2.97	3.11	3.20	3.23			
120	3.41	3.31	3.19	3.03	2.91	2.78	2.73	2.71	3.12	3.23	3.35	3.55	3.72	3.86	3.93	3.95			
125	4.09	4.01	3.90	3.75	3.63	3.48	3.43	3.39	3.84	3.96	4.10	4.30	4.47	4.57	4.63	4.62			
130	4.73	4.66	4.58	4.46	4.36	4.21	4.14	4.11	4.58	4.70	4.83	5.02	5.18	5.24	5.27	5.25			
135	5.32	5.24	5.19	5.10	5.04	4.90	4.84	4.80	5.29	5.40	5.52	5.68	5.80	5.84	5.84	5.83			
140	5.85	5.76	5.70	5.65	5.64	5.51	5.48	5.44	5.92	6.03	6.11	6.26	6.34	6.36	6.37	6.38			
145	6.40	6.27	6.17	6.14	6.15	6.05	6.03	6.01	6.48	6.58	6.62	6.74	6.83	6.87	6.88	6.93			
150	6.97	6.80	6.67	6.64	6.62	6.52	6.50	6.50	6.97	7.05	7.07	7.20	7.31	7.40	7.42	7.49			
155	7.57	7.39	7.24	7.19	7.13	7.00	6.99	6.98	7.44	7.52	7.56	7.69	7.85	7.98	8.03	8.06			
160	8.25	8.06	7.92	7.83	7.71	7.55	7.55	7.50	7.96	8.06	8.15	8.26	8.46	8.64	8.74	8.75			
165	9.11	8.91	8.74	8.59	8.43	8.24	8.20	8.19	8.60	8.73	8.80	8.97	9.19	9.40	9.54	9.58			
170	9.90	9.73	9.59	9.42	9.22	9.02	9.01	9.01	9.32	9.48	9.53	9.68	9.87	10.1	10.2	10.3			
175	10.4	10.3	10.3	10.1	9.96	9.85	9.90	9.85	10.0	10.2	10.2	10.3	10.4	10.5	10.7	10.6			
180	10.5	10.5	10.5	10.5	10.5	10.5	10.6	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.6	10.5			

C角度范围: 0度 - 360度

C角度间隔: 22.5度

测试速度: 快速

环境温度: 25.3℃

测试人员: DAMIN

测试日期: 2023-10-14

γ角度范围: 0度 - 180度

γ角度间隔: 5.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473

环境湿度: 65.0%

测试距离: 9.401米 [K=1.0000]

备注: