


室内灯具光度数据


实测参数: U:220.03V I:0.9204A P:198.64W PF:0.9809 Freq:50.00Hz 实检光通: 31311.3x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

光源数据		光度数据				光效: 157.63 lm/W
型号	俄罗斯GGL-710-200W	峰值光强(cd)	15555	S/MH(C0/180)	1.38	
标称功率(W)	200	灯具效率(%)	100.0	S/MH(C90/270)	1.32	
额定电源电压(V)	220	总光通量(lm)	31311	η UP,DN(C0-180)	0.5,50.2	
额定光通量(lm)	31311.3	CIE分类	直接	η UP,DN(C180-360)	0.6,48.8	
灯具内光源数(只)	1	上射光通比(%)	1.1	CIBSE SHR NOM	1.25	
实测电源电压(V)	219.5	下射光通比(%)	98.9	CIBSE SHR MAX	1.35	

室内灯具配光曲线

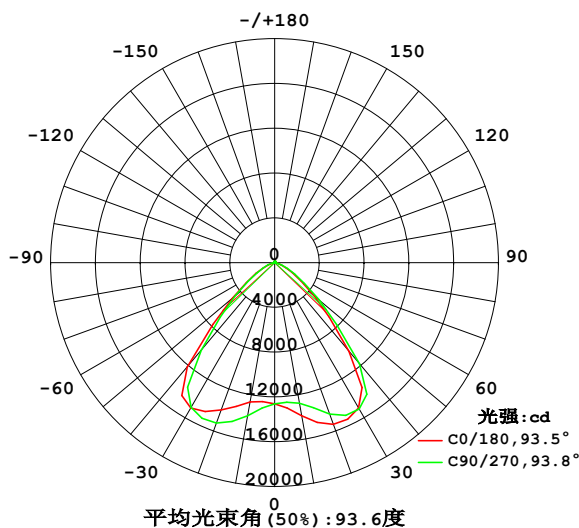

空间等照度曲线(单位:lx)

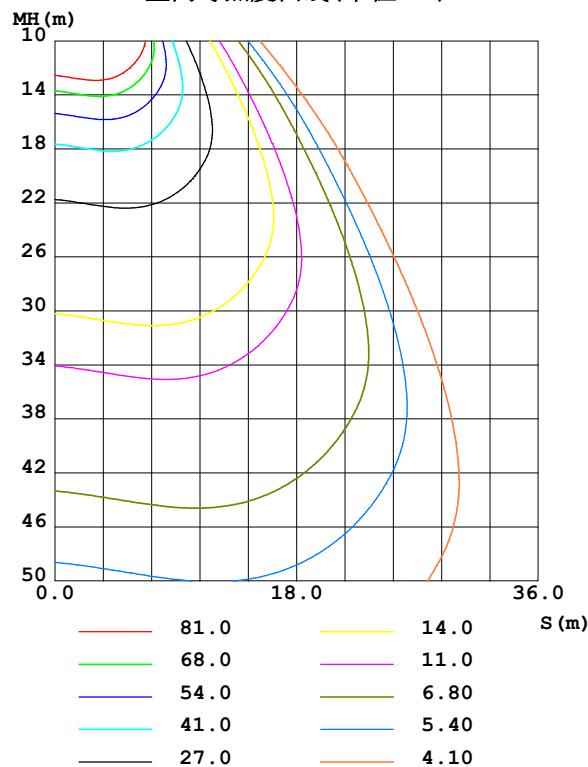

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

Y角度范围: 0度 - 180度
Y角度间隔: 5.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
10	1387	1336	1275	1246	1262	1333	1389	1413	0- 10	1236	1236	3.95, 3.95
20	1536	1498	1440	1380	1401	1474	1524	1549	10- 20	3995	5231	16.7, 16.7
30	1499	1499	1510	1506	1499	1502	1494	1499	20- 30	6954	12185	38.9, 38.9
40	1033	1086	1179	1253	1217	1103	1021	999.1	30- 40	8470	20655	66, 66
50	459.2	496.0	519.8	513.5	491.8	467.5	456.0	452.2	40- 50	5885	26540	84.8, 84.8
60	182.8	196.9	205.0	203.9	192.7	186.7	183.4	181.0	50- 60	2852	29391	93.9, 93.9
70	61.52	71.08	72.79	68.30	63.15	65.32	63.93	60.34	60- 70	1215	30606	97.7, 97.7
80	3.271	5.877	10.12	5.952	3.054	5.699	11.08	5.709	70- 80	337.5	30944	98.8, 98.8
90	0.6009	0.7808	0.6602	0.7701	0.6949	0.9644	0.7959	1.008	80- 90	34.73	30978	98.9, 98.9
100	1.573	1.484	1.292	1.456	1.797	1.800	1.766	1.920	90-100	13.04	30992	99, 99
110	2.907	2.762	2.642	2.635	3.177	3.279	3.427	3.505	100-110	24.52	31016	99.1, 99.1
120	4.723	4.578	4.477	4.414	5.057	5.197	5.373	5.402	110-120	39.32	31055	99.2, 99.2
130	6.428	6.335	6.301	6.224	6.886	6.991	7.114	7.072	120-130	51.92	31107	99.3, 99.3
140	7.752	7.600	7.716	7.567	8.322	8.309	8.465	8.291	130-140	56.85	31164	99.5, 99.5
150	9.082	8.839	8.878	8.767	9.543	9.524	9.655	9.585	140-150	53.96	31218	99.7, 99.7
160	10.79	10.57	10.42	10.30	10.98	11.15	11.36	11.46	150-160	46.06	31264	99.8, 99.8
170	13.25	13.01	12.81	12.68	13.18	13.38	13.65	13.83	160-170	33.88	31298	100, 100
180	14.58	14.58	14.52	14.66	14.64	14.62	14.55	14.69	170-180	13.24	31311	100, 100
单位: $^{\circ}$	光强: $\times 10\text{cd}$									单位: lm		

锥面光通量(90度): 24076 lm

%lum = 76.9%

%lamp = 76.9%

锥面光通量(130度): 30142 lm

%lum = 96.3%


%lamp = 96.3%

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3 $^{\circ}\text{C}$
测试人员: DAMIN
测试日期: 2023-10-14

γ 角度范围: 0度 - 180度
 γ 角度间隔: 5.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

灯具亮度限制曲线

实测参数: U:220.03V I:0.9204A P:198.64W PF:0.9809 Freq:50.00Hz 实检光通: 31311.3x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

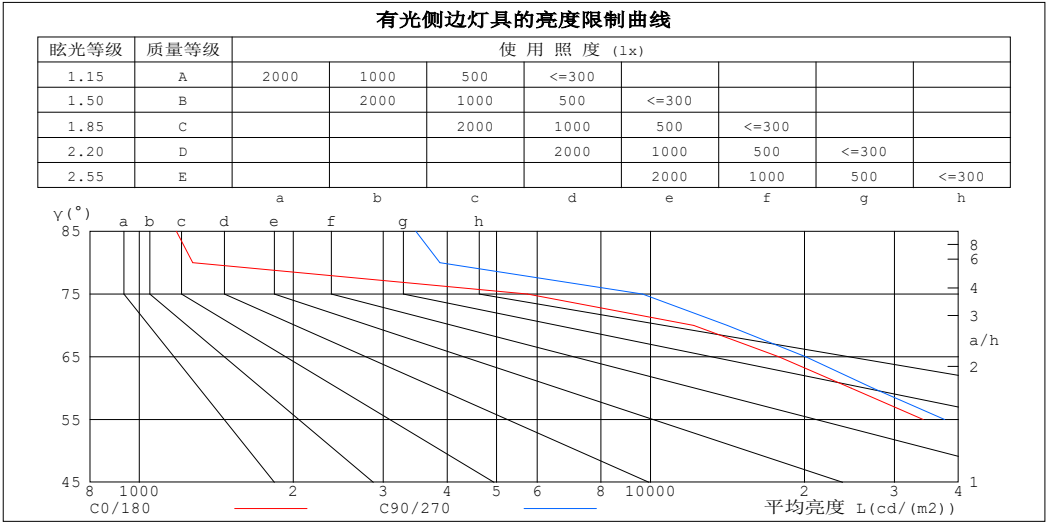

平均亮度值 cd/(m2)		
$\gamma(^{\circ})$	C0/180	C90/270
85	1181	3472
80	1273	3873
75	5749	9650
70	12154	14142
65	17819	20126
60	24710	27243
55	34179	37612
50	48273	53731
45	66099	74040


C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ 角度范围: 0度 - 180度
 γ 角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:220.03V I:0.9204A P:198.64W PF:0.9809 Freq:50.00Hz 实检光通: 31311.3x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.08	1.05	1.02	1.06	1.03	1.00	1.01	.99	.97	.97	.95	.94	.94	.92	.91	.89
2.0	.97	.92	.87	.95	.90	.86	.92	.88	.84	.89	.85	.82	.85	.83	.80	.78
3.0	.88	.81	.76	.86	.80	.75	.83	.78	.74	.80	.76	.73	.78	.74	.71	.69
4.0	.79	.72	.67	.78	.71	.66	.76	.70	.65	.73	.68	.64	.71	.67	.63	.61
5.0	.72	.65	.59	.71	.64	.59	.69	.63	.58	.67	.62	.57	.65	.60	.57	.55
6.0	.66	.58	.53	.65	.58	.52	.63	.57	.52	.61	.56	.51	.60	.55	.51	.49
7.0	.60	.52	.47	.59	.52	.47	.58	.51	.47	.56	.51	.46	.55	.50	.46	.44
8.0	.55	.48	.42	.55	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.38	.34	.33

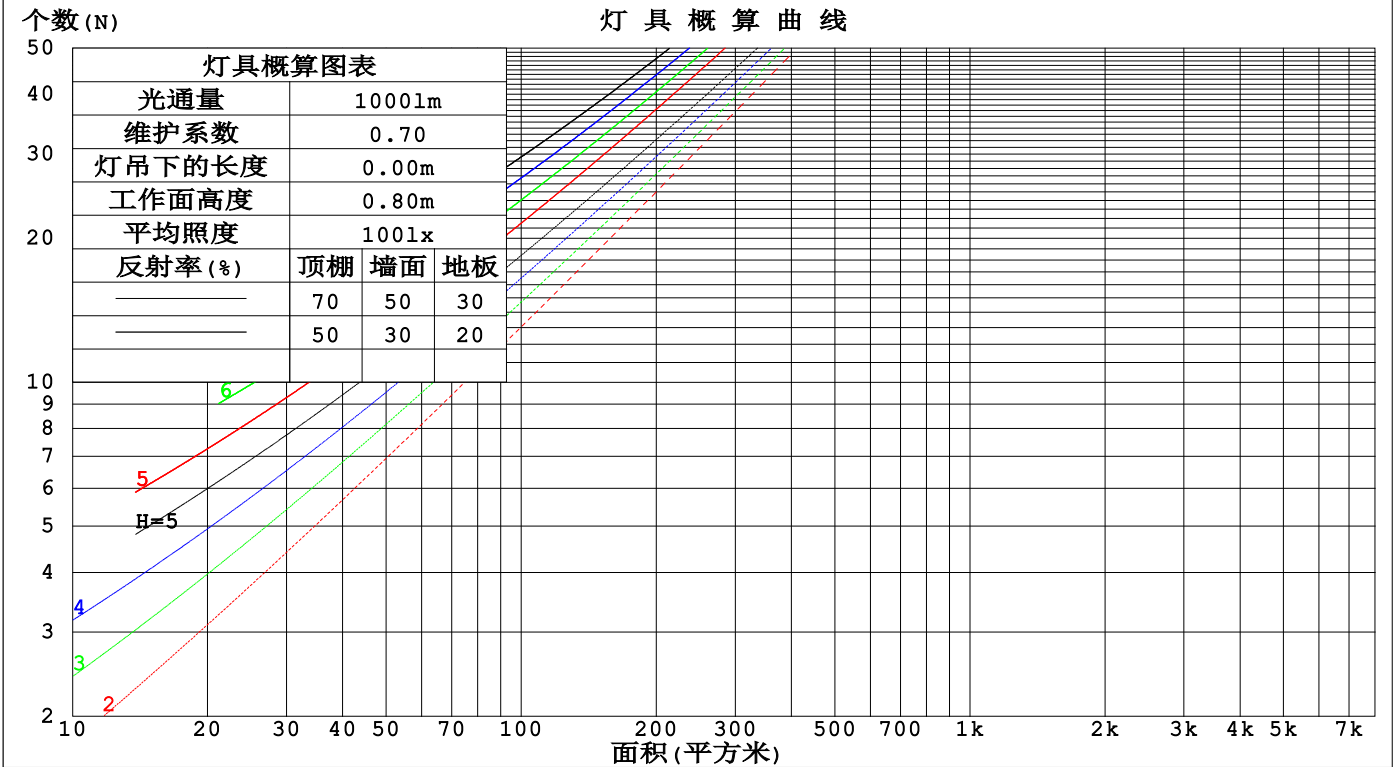

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:220.03V I:0.9204A P:198.64W PF:0.9809 Freq:50.00Hz 实检光通: 31311.3x1 lm					
灯具名称: 710		灯具类型: UFO		灯具重量:	
灯具规格:		外型尺寸:		测试编号:	
制造厂商: EVERFINE		发光口面: 0.1		遮光角:	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.229	.130	.041	.222	.127	.040	.209	.120	.038	.196	.113	.036	.185	.107	.035	
2.0	.224	.123	.038	.218	.120	.037	.206	.115	.036	.196	.110	.034	.186	.105	.033	
3.0	.215	.114	.034	.209	.112	.034	.199	.108	.033	.190	.104	.032	.181	.100	.031	
4.0	.204	.106	.031	.199	.104	.031	.190	.101	.030	.182	.098	.029	.174	.095	.029	
5.0	.193	.098	.029	.189	.097	.028	.181	.094	.028	.173	.092	.027	.167	.089	.027	
6.0	.183	.092	.026	.179	.090	.026	.172	.088	.026	.165	.086	.025	.159	.084	.025	
7.0	.173	.086	.024	.170	.085	.024	.164	.083	.024	.157	.081	.023	.152	.079	.023	
8.0	.164	.080	.023	.161	.079	.022	.156	.078	.022	.150	.076	.022	.145	.074	.022	
9.0	.156	.075	.021	.153	.075	.021	.148	.073	.021	.143	.072	.021	.138	.070	.020	
10.0	.148	.071	.020	.146	.070	.020	.141	.069	.019	.137	.068	.019	.132	.067	.019	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.199	.199	.199	.170	.170	.170	.116	.116	.116	.067	.067	.067	.021	.021	.021	
1.0	.183	.165	.149	.156	.142	.128	.107	.097	.089	.062	.056	.052	.020	.018	.017	
2.0	.171	.140	.114	.147	.121	.099	.101	.084	.069	.058	.049	.040	.019	.016	.013	
3.0	.162	.122	.090	.139	.105	.078	.095	.073	.055	.055	.043	.032	.018	.014	.011	
4.0	.154	.108	.073	.132	.094	.064	.091	.065	.045	.053	.038	.027	.017	.012	.009	
5.0	.147	.097	.061	.126	.084	.053	.087	.059	.037	.050	.035	.022	.016	.011	.007	
6.0	.140	.089	.052	.121	.077	.045	.083	.054	.032	.048	.032	.019	.016	.010	.006	
7.0	.134	.082	.045	.115	.071	.039	.080	.050	.028	.046	.029	.017	.015	.010	.005	
8.0	.129	.076	.040	.111	.066	.035	.077	.046	.025	.045	.027	.015	.014	.009	.005	
9.0	.123	.071	.036	.106	.062	.031	.074	.043	.022	.043	.026	.013	.014	.008	.004	
10.0	.118	.067	.032	.102	.058	.028	.071	.041	.020	.041	.024	.012	.013	.008	.004	

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:220.03V I:0.9204A P:198.64W PF:0.9809 Freq:50.00Hz 实检光通: 31311.3x1 lm										
灯具名称: 710			灯具类型: UFO			灯具重量:				
灯具规格:			外型尺寸:			测试编号:				
制造厂商: EVERFINE			发光口面: 0.1			遮光角:				
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	横向 (Viewed crosswise)					纵向 (Viewed endwise)				
x = 2H y = 2H	12.6	13.9	12.9	14.1	14.3	13.0	14.3	13.3	14.5	14.7
3H	12.7	13.9	13.0	14.1	14.3	13.1	14.2	13.4	14.5	14.7
4H	12.6	13.7	13.0	14.0	14.2	13.1	14.1	13.4	14.4	14.7
6H	12.5	13.6	12.9	13.8	14.1	13.0	14.0	13.3	14.3	14.5
8H	12.5	13.5	12.8	13.8	14.1	12.9	13.9	13.3	14.2	14.5
12H	12.4	13.4	12.8	13.7	14.0	12.9	13.8	13.2	14.1	14.4
4H 2H	12.6	13.7	12.9	14.0	14.2	13.0	14.0	13.3	14.3	14.6
3H	12.8	13.7	13.1	14.0	14.3	13.1	14.0	13.5	14.3	14.7
4H	12.7	13.5	13.1	13.9	14.2	13.1	13.9	13.5	14.3	14.6
6H	12.6	13.4	13.0	13.7	14.1	13.0	13.8	13.4	14.1	14.5
8H	12.6	13.2	13.0	13.6	14.0	13.0	13.7	13.4	14.0	14.4
12H	12.5	13.1	13.0	13.5	14.0	12.9	13.6	13.4	14.0	14.4
8H 4H	12.6	13.3	13.0	13.7	14.1	13.0	13.7	13.4	14.1	14.4
6H	12.5	13.1	13.0	13.5	13.9	12.9	13.5	13.4	13.9	14.3
8H	12.5	13.0	12.9	13.4	13.9	12.9	13.4	13.4	13.8	14.3
12H	12.4	12.8	12.9	13.3	13.8	12.8	13.3	13.3	13.7	14.2
12H 4H	12.6	13.2	13.0	13.6	14.0	12.9	13.6	13.4	14.0	14.4
6H	12.5	13.0	12.9	13.4	13.9	12.9	13.4	13.3	13.8	14.3
8H	12.4	12.8	12.9	13.3	13.8	12.8	13.3	13.3	13.7	14.2
不同间隔布灯时, 观察者位置引起的UGR变化 (CIE Pub.117):										
S = 1.0H	+ 1.6 / - 2.8					+ 1.5 / - 2.7				
1.5H	+ 1.9 / - 2.2					+ 2.1 / - 2.2				
2.0H	+ 3.1 / - 2.8					+ 3.4 / - 2.8				

依据CIE Pub.117计算, 31311lm光源光通表格中的数据需要进行修正 ($81\log(F/F_0) = 12.0$).

出光口面积: 0.15 m²

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:220.03V I:0.9204A P:198.64W PF:0.9809 Freq:50.00Hz 实检光通: 31311.3x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5									
k = 0.60	70	61	55	69	60	55	68	60	55	49
0.80	80	71	65	79	70	65	77	70	64	59
1.00	87	79	73	86	78	73	84	79	73	67
1.25	93	86	80	92	85	80	90	84	79	73
1.50	97	90	85	96	89	85	93	88	84	78
2.00	102	96	92	101	95	91	98	93	89	83
2.50	105	100	95	103	98	94	100	96	92	85
3.00	107	103	99	105	101	98	102	98	95	88
4.00	110	106	103	108	104	101	104	101	99	90
5.00	112	108	106	110	106	104	105	103	101	92
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHR _{NOM} = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方(EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:220.03V I:0.9204A P:198.64W PF:0.9809 Freq:50.00Hz 实检光通: 31311.3x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

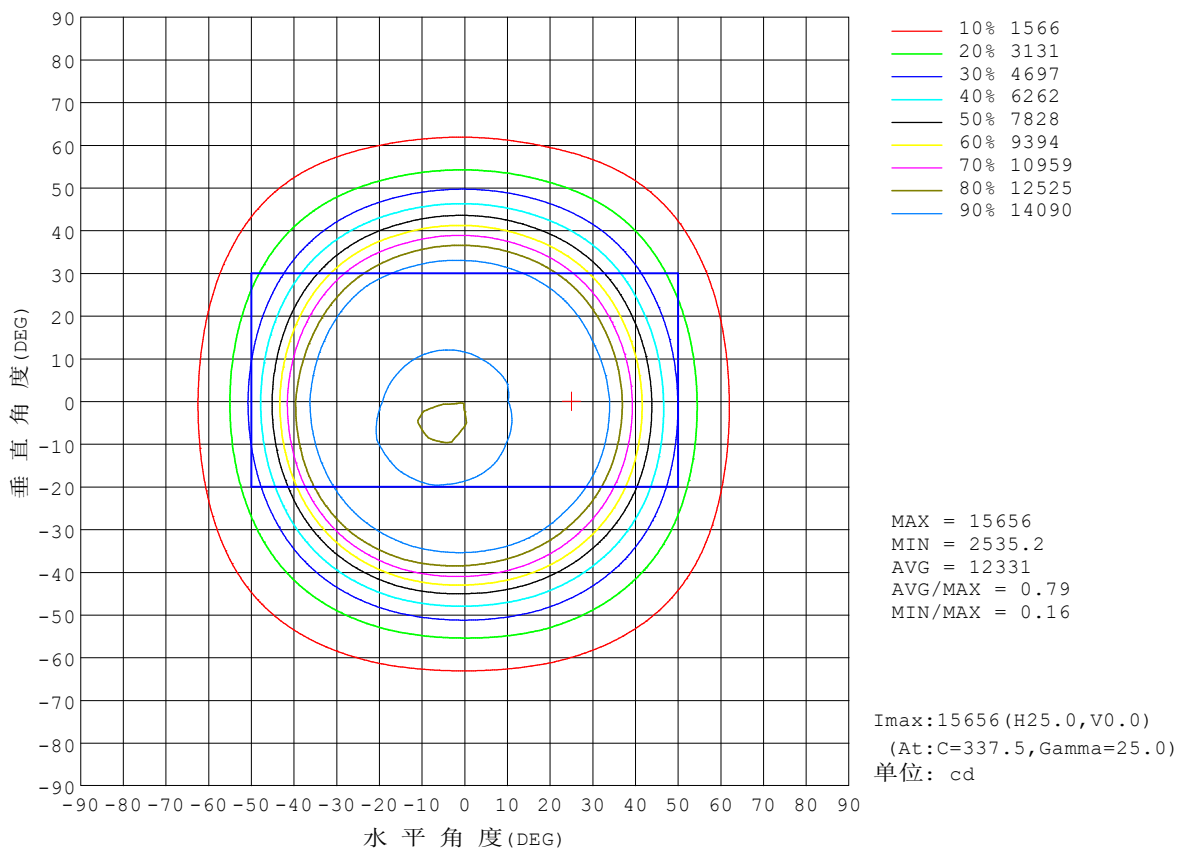


C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

灯具有效平均照度图

实测参数: U:220.03V I:0.9204A P:198.64W PF:0.9809 Freq:50.00Hz 实检光通: 31311.3x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

光通输出: 26540 lm

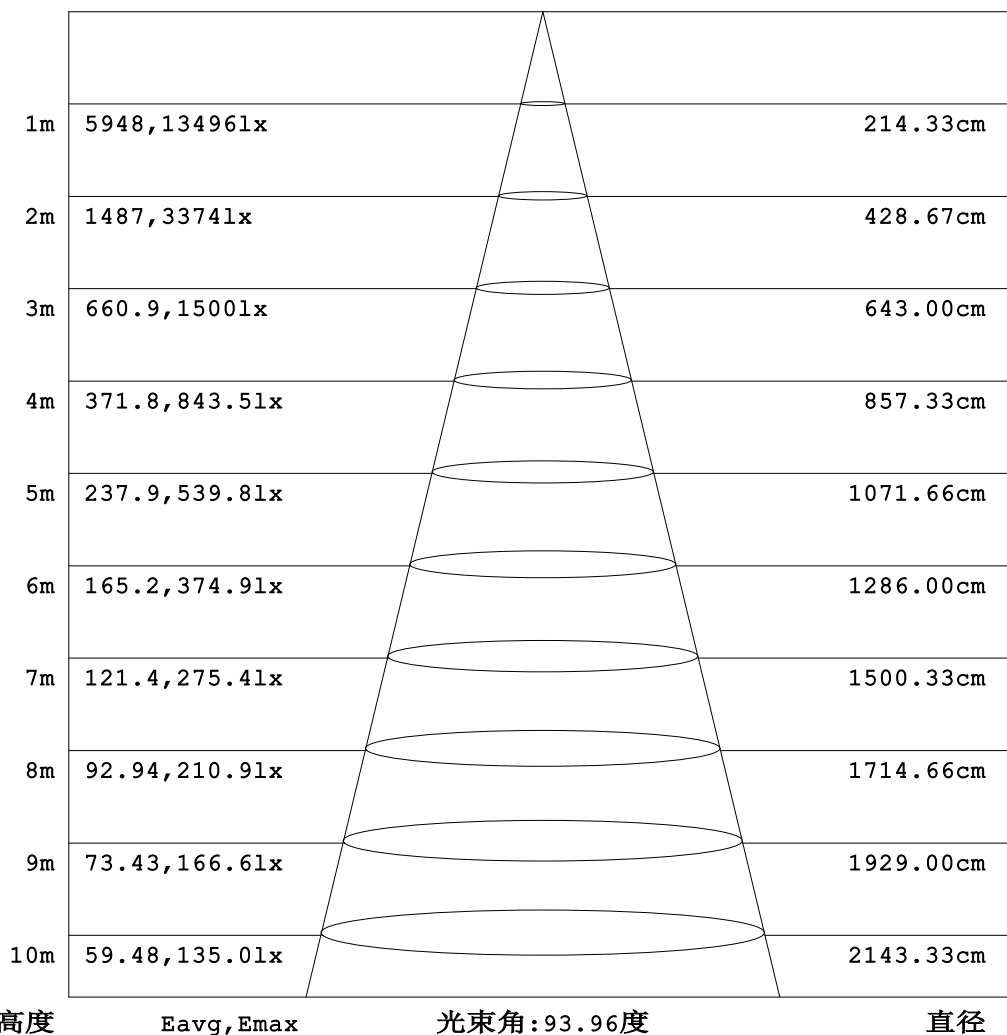


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:220.03V I:0.9204A P:198.64W PF:0.9809 Freq:50.00Hz 实检光通: 31311.3x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:

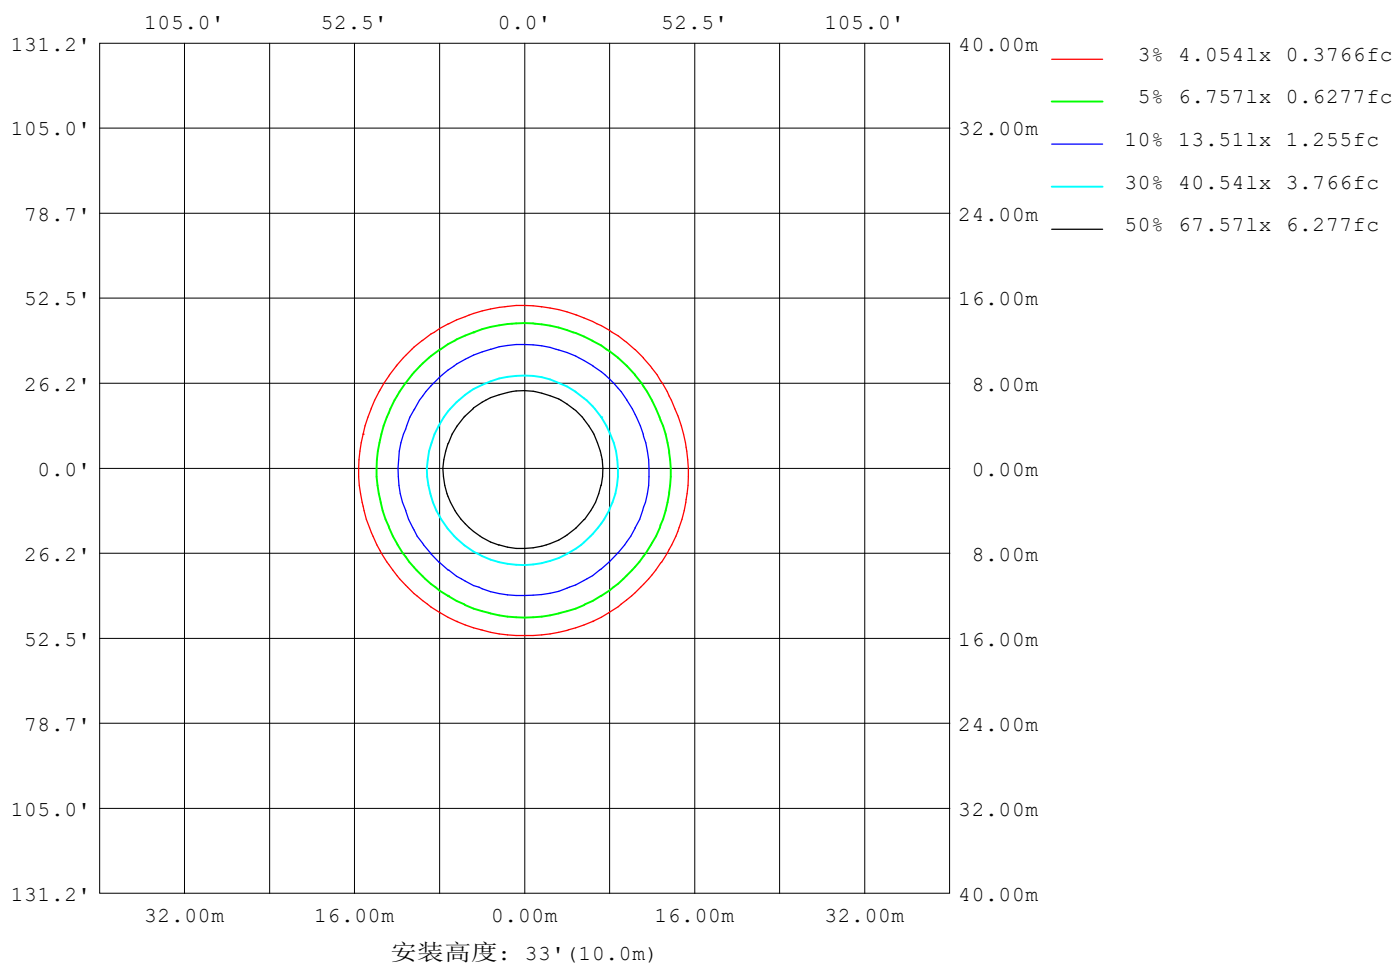

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:220.03V I:0.9204A P:198.64W PF:0.9809 Freq:50.00Hz 实检光通: 31311.3x1 lm		
灯具名称: 710	灯具类型: UFO	灯具重量:
灯具规格:	外型尺寸:	测试编号:
制造厂商: EVERFINE	发光口面: 0.1	遮光角:


平均亮度	数值 (cd/m2)
L横 (65) av	17928
L横 (75) av	5835
L横 (85) av	1162
L纵 (65) av	19009
L纵 (75) av	8941
L纵 (85) av	3868
L45 (65) av	18564
L45 (75) av	6904
L45 (85) av	1720

注: 依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

平面照度曲线

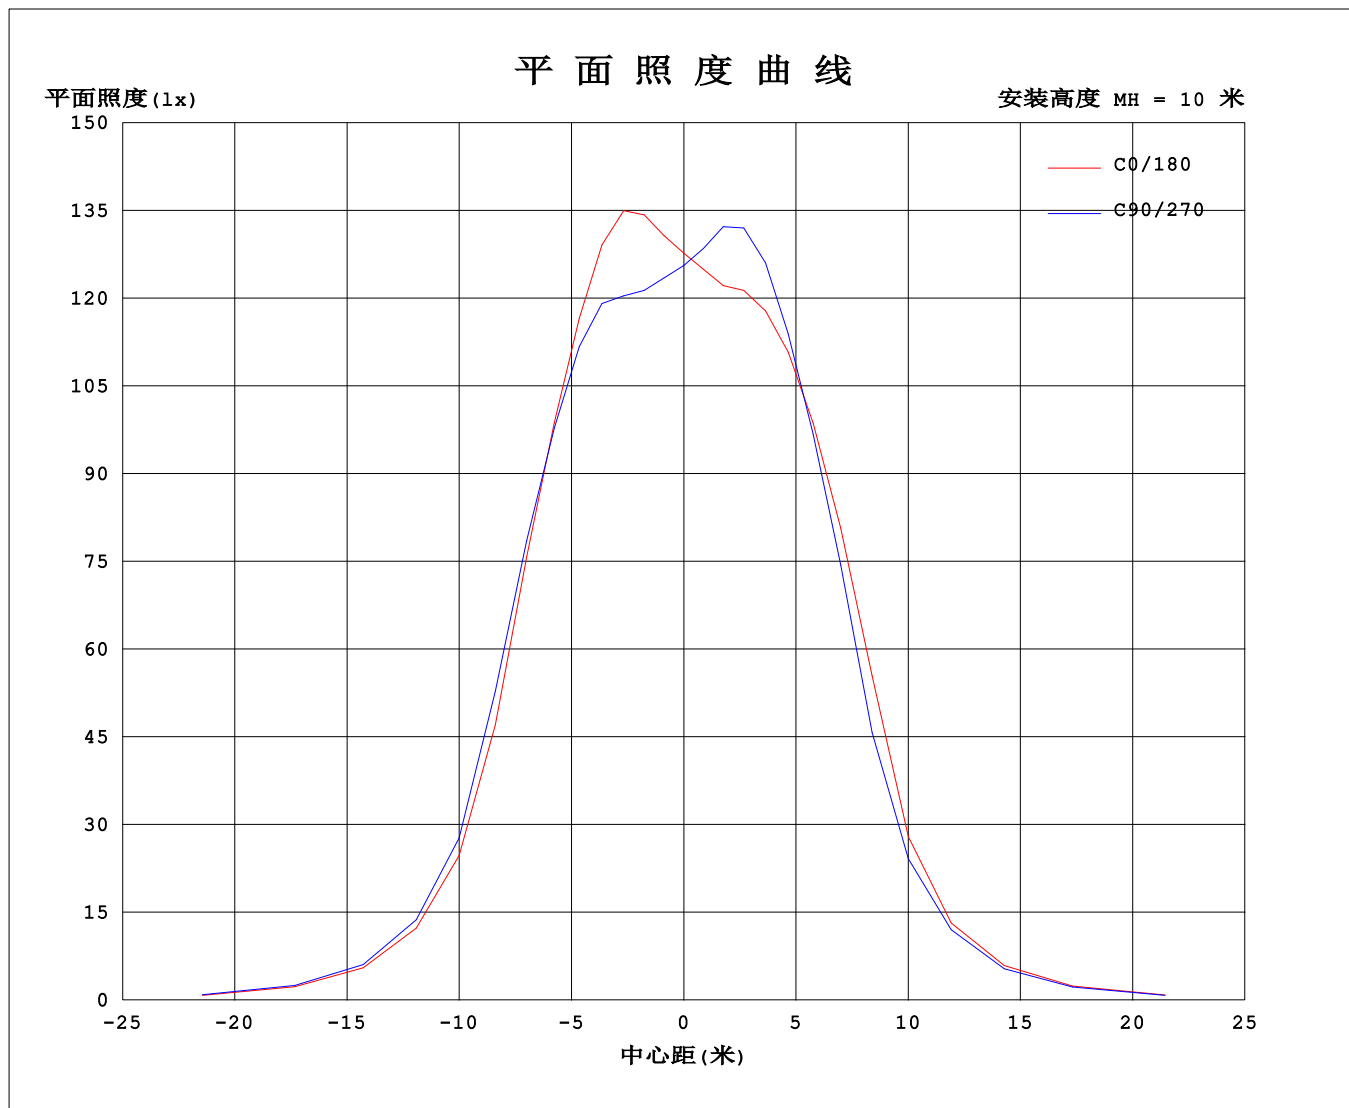

C角度范围: 0度 - 360度
C角度间隔: 22.5度
测试速度: 快速
环境温度: 25.3℃
测试人员: DAMIN
测试日期: 2023-10-14

γ角度范围: 0度 - 180度
γ角度间隔: 5.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473
环境湿度: 65.0%
测试距离: 9.401米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:220.03V I:0.9204A P:198.64W PF:0.9809 Freq:50.00Hz 实检光通: 31311.3x1 lm																	
灯具名称: 710									灯具类型: UFO						灯具重量:		
灯具规格:									外型尺寸:						测试编号:		
制造厂商: EVERFINE									发光口面: 0.1						遮光角:		

表--1

单位: ×10cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1260	1260	1260	1260	1260	1260	1260	1260	1260	1260	1260	1260	1260	1260	1260	1260			
5	1304	1291	1279	1264	1253	1244	1241	1240	1247	1258	1272	1291	1304	1315	1315	1311			
10	1387	1363	1336	1302	1275	1255	1246	1246	1262	1298	1333	1365	1389	1407	1413	1407			
15	1477	1452	1426	1383	1341	1301	1285	1291	1328	1372	1407	1441	1470	1489	1498	1498			
20	1536	1517	1498	1473	1440	1399	1380	1380	1401	1439	1474	1506	1524	1539	1549	1552			
25	1545	1536	1526	1520	1506	1486	1470	1467	1469	1490	1512	1530	1535	1544	1552	1556			
30	1499	1501	1499	1507	1510	1513	1506	1506	1499	1495	1502	1499	1494	1495	1499	1502			
35	1361	1381	1389	1415	1435	1456	1463	1468	1448	1423	1406	1376	1358	1347	1354	1358			
40	1033	1064	1086	1133	1179	1226	1253	1262	1217	1152	1103	1043	1021	995	999	1008			
45	692	727	737	772	788	815	813	801	781	749	721	694	688	673	671	671			
50	459	484	496	515	520	524	513	503	492	476	468	458	456	449	452	446			
55	290	309	315	327	325	327	323	317	309	301	296	288	287	279	284	279			
60	183	193	197	206	205	208	204	201	193	185	187	183	183	176	181	180			
65	111	118	121	127	128	130	125	123	116	111	115	113	113	110	109	107			
70	61.5	66.8	71.1	73.1	72.8	73.6	68.3	68.4	63.2	60.9	65.3	64.1	63.9	61.5	60.3	57.5			
75	22.0	27.6	29.2	35.4	37.6	36.8	28.5	28.2	23.3	21.8	24.5	28.7	31.8	28.0	25.0	22.2			
80	3.27	4.21	5.88	8.91	10.1	8.54	5.95	3.89	3.05	3.61	5.70	8.06	11.1	8.19	5.71	3.80			
85	1.52	1.99	2.06	3.50	4.55	3.31	1.80	1.93	1.51	1.97	2.46	4.35	5.56	4.32	2.67	2.12			
90	0.60	0.77	0.78	0.75	0.66	0.73	0.77	0.74	0.69	0.91	0.96	0.95	0.80	0.96	1.01	0.96			
95	1.01	1.11	1.12	1.02	0.90	1.01	1.10	1.06	1.14	1.27	1.29	1.27	1.18	1.30	1.35	1.35			
100	1.57	1.56	1.48	1.38	1.29	1.36	1.46	1.60	1.80	1.86	1.80	1.79	1.77	1.85	1.92	2.01			
105	2.17	2.16	2.06	1.96	1.87	1.91	1.94	2.03	2.40	2.51	2.45	2.53	2.52	2.62	2.66	2.76			
110	2.91	2.86	2.76	2.70	2.64	2.65	2.63	2.69	3.18	3.27	3.28	3.40	3.43	3.52	3.51	3.54			
115	3.79	3.72	3.64	3.57	3.52	3.50	3.48	3.50	4.09	4.17	4.22	4.36	4.40	4.47	4.46	4.46			
120	4.72	4.63	4.58	4.49	4.48	4.42	4.41	4.41	5.06	5.13	5.20	5.32	5.37	5.42	5.40	5.39			
125	5.62	5.53	5.50	5.43	5.42	5.36	5.35	5.33	6.02	6.06	6.15	6.24	6.30	6.31	6.29	6.25			
130	6.43	6.34	6.33	6.31	6.30	6.24	6.22	6.18	6.89	6.90	6.99	7.07	7.11	7.10	7.07	7.02			
135	7.11	7.02	7.05	7.05	7.07	7.01	6.98	6.94	7.65	7.64	7.71	7.79	7.83	7.79	7.73	7.68			
140	7.75	7.66	7.60	7.71	7.72	7.63	7.57	7.64	8.32	8.30	8.31	8.42	8.46	8.39	8.29	8.34			
145	8.42	8.27	8.21	8.23	8.34	8.20	8.18	8.23	8.95	8.92	8.93	8.93	9.05	8.95	8.92	8.95			
150	9.08	8.92	8.84	8.86	8.88	8.73	8.77	8.83	9.54	9.53	9.52	9.51	9.65	9.61	9.59	9.60			
155	9.83	9.66	9.62	9.58	9.55	9.39	9.45	9.49	10.2	10.2	10.2	10.2	10.4	10.4	10.4	10.4			
160	10.8	10.6	10.6	10.6	10.4	10.3	10.3	10.3	11.0	11.0	11.2	11.2	11.4	11.5	11.5	11.3			
165	12.0	11.8	11.8	11.7	11.6	11.5	11.4	11.4	12.1	12.1	12.3	12.4	12.6	12.7	12.7	12.6			
170	13.3	13.1	13.0	12.9	12.8	12.7	12.7	12.7	13.2	13.3	13.4	13.4	13.6	13.8	13.8	13.8			
175	14.2	14.1	14.1	14.0	13.9	13.8	13.9	13.9	14.1	14.2	14.3	14.3	14.4	14.5	14.6	14.6			
180	14.6	14.6	14.6	14.6	14.5	14.6	14.7	14.7	14.6	14.6	14.6	14.5	14.5	14.6	14.7	14.6			

C角度范围: 0度 - 360度

C角度间隔: 22.5度

测试速度: 快速

环境温度: 25.3℃

测试人员: DAMIN

测试日期: 2023-10-14

γ角度范围: 0度 - 180度

γ角度间隔: 5.0度

测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.00.473

环境湿度: 65.0%

测试距离: 9.401米 [K=1.0000]

备注: