
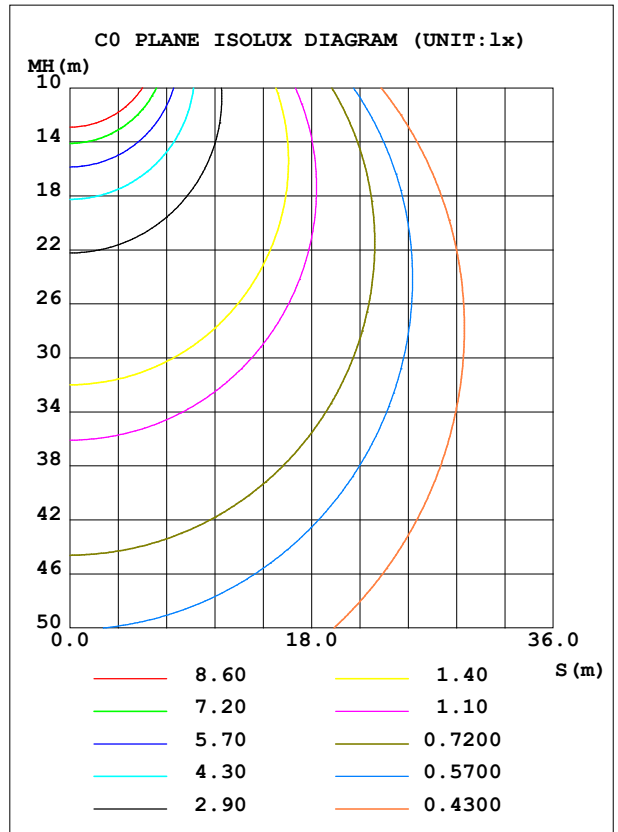


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.30V I:0.1796A P:38.899W PF:0.9832 Freq:50.00Hz Lamp Flux:5312.69x1 lm		
NAME: 线条灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	T12	Imax (cd)	1426	S/MH (C0/180)	1.32
NOMINAL POWER (W)	40	LOR (%)	100.0	S/MH (C90/270)	1.22
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	5312.7	η UP, DN (C0-180)	6.3, 43.7
NOMINAL FLUX (lm)	5312.69	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	6.2, 43.8
LAMPS INSIDE	1	η up (%)	12.5	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	219.5	η down (%)	87.5	CIBSE SHR MAX	1.50

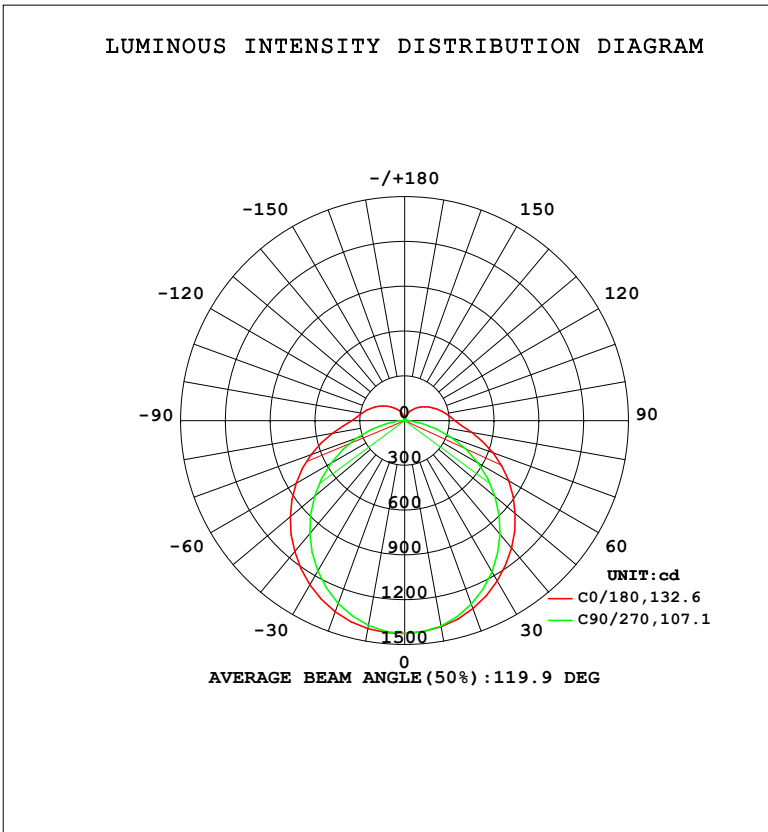

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-11-15

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1403	1401	1397	1407	1415	1405	1394	1399	0- 10	135.0	135.0	2.54,2.54
20	1340	1329	1309	1339	1362	1336	1303	1325	10- 20	387.4	522.4	9.83,9.83
30	1240	1213	1170	1227	1269	1224	1164	1208	20- 30	589.0	1111	20.9,20.9
40	1113	1067	993.5	1081	1146	1080	988.8	1061	30- 40	716.4	1828	34.4,34.4
50	967.2	898.5	790.3	912.5	1001	912.7	788.2	892.8	40- 50	759.8	2588	48.7,48.7
60	804.4	716.1	568.7	729.2	840.4	732.7	570.4	711.5	50- 60	720.5	3308	62.3,62.3
70	629.8	526.7	338.5	538.7	666.3	544.9	344.6	523.5	60- 70	609.0	3917	73.7,73.7
80	455.4	344.4	121.6	354.3	489.8	364.5	129.1	343.1	70- 80	446.0	4363	82.1,82.1
90	337.3	226.1	4.447	228.1	353.9	233.3	6.108	213.5	80- 90	282.8	4646	87.5,87.5
100	282.5	181.8	4.840	184.2	292.7	187.9	5.824	171.2	90-100	200.8	4847	91.2,91.2
110	231.6	138.0	5.979	147.9	243.0	148.9	6.488	119.1	100-110	157.0	5004	94.2,94.2
120	185.8	95.72	7.118	117.7	195.6	118.3	7.753	87.92	110-120	116.8	5121	96.4,96.4
130	143.8	67.59	8.365	92.46	152.2	93.44	9.008	62.57	120-130	81.77	5202	97.9,97.9
140	107.5	48.77	9.722	70.59	113.7	71.60	10.32	46.94	130-140	53.03	5255	98.9,98.9
150	75.61	34.29	11.24	51.25	79.71	52.07	11.64	33.42	140-150	32.07	5287	99.5,99.5
160	47.33	26.08	12.49	34.20	50.26	34.91	12.68	25.99	150-160	16.83	5304	99.8,99.8
170	19.99	18.70	13.38	20.25	20.58	20.46	13.50	18.98	160-170	6.923	5311	100,100
180	13.79	13.82	13.89	14.00	13.87	13.85	13.91	13.97	170-180	1.552	5313	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2207.6 lm

%lum = 41.6%

%lamp = 41.6%

Conical surface Flux(130deg): 3630.5 lm

%lum = 68.3%


%lamp = 68.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-15

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.30V I:0.1796A P:38.899W PF:0.9832 Freq:50.00Hz Lamp Flux:5312.69x1 lm		
NAME: 线条灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

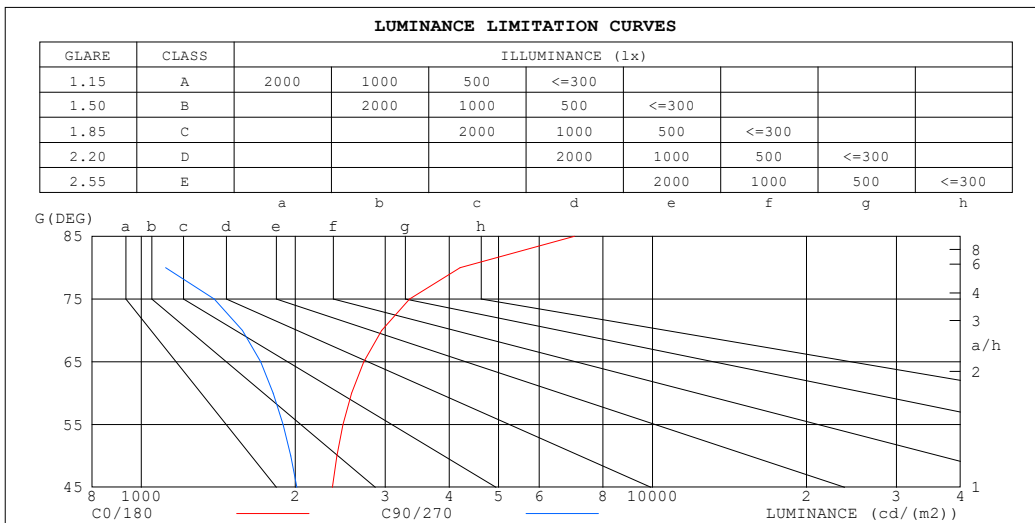

LUMINANCE cd/ (m2)		
G (DEG)	C0/180	C90/270
85	7028	713
80	4203	1116
75	3348	1388
70	2951	1577
65	2724	1712
60	2578	1812
55	2481	1893
50	2412	1959
45	2363	2015


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-15

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.30V I:0.1796A P:38.899W PF:0.9832 Freq:50.00Hz Lamp Flux:5312.69x1 lm		
NAME: 线条灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	.97	.97	.97	.91	.91	.91	.87
1.0	.99	.94	.89	.95	.91	.86	.88	.85	.81	.82	.79	.77	.77	.74	.72	.69
2.0	.85	.77	.71	.82	.75	.69	.76	.71	.66	.71	.66	.62	.66	.63	.59	.56
3.0	.74	.65	.58	.71	.63	.57	.67	.60	.54	.62	.57	.52	.58	.53	.49	.47
4.0	.65	.56	.49	.63	.55	.48	.59	.52	.46	.55	.49	.44	.51	.46	.42	.39
5.0	.58	.49	.42	.56	.48	.41	.53	.45	.39	.49	.43	.38	.46	.41	.36	.34
6.0	.52	.43	.36	.50	.42	.36	.47	.40	.34	.44	.38	.33	.42	.36	.32	.29
7.0	.47	.38	.32	.46	.37	.31	.43	.36	.30	.40	.34	.29	.38	.32	.28	.26
8.0	.43	.34	.28	.42	.33	.28	.39	.32	.27	.37	.31	.26	.35	.29	.25	.23
9.0	.39	.31	.25	.38	.30	.25	.36	.29	.24	.34	.28	.23	.32	.27	.23	.21
10.0	.36	.28	.23	.35	.28	.23	.33	.27	.22	.32	.25	.21	.30	.24	.20	.19

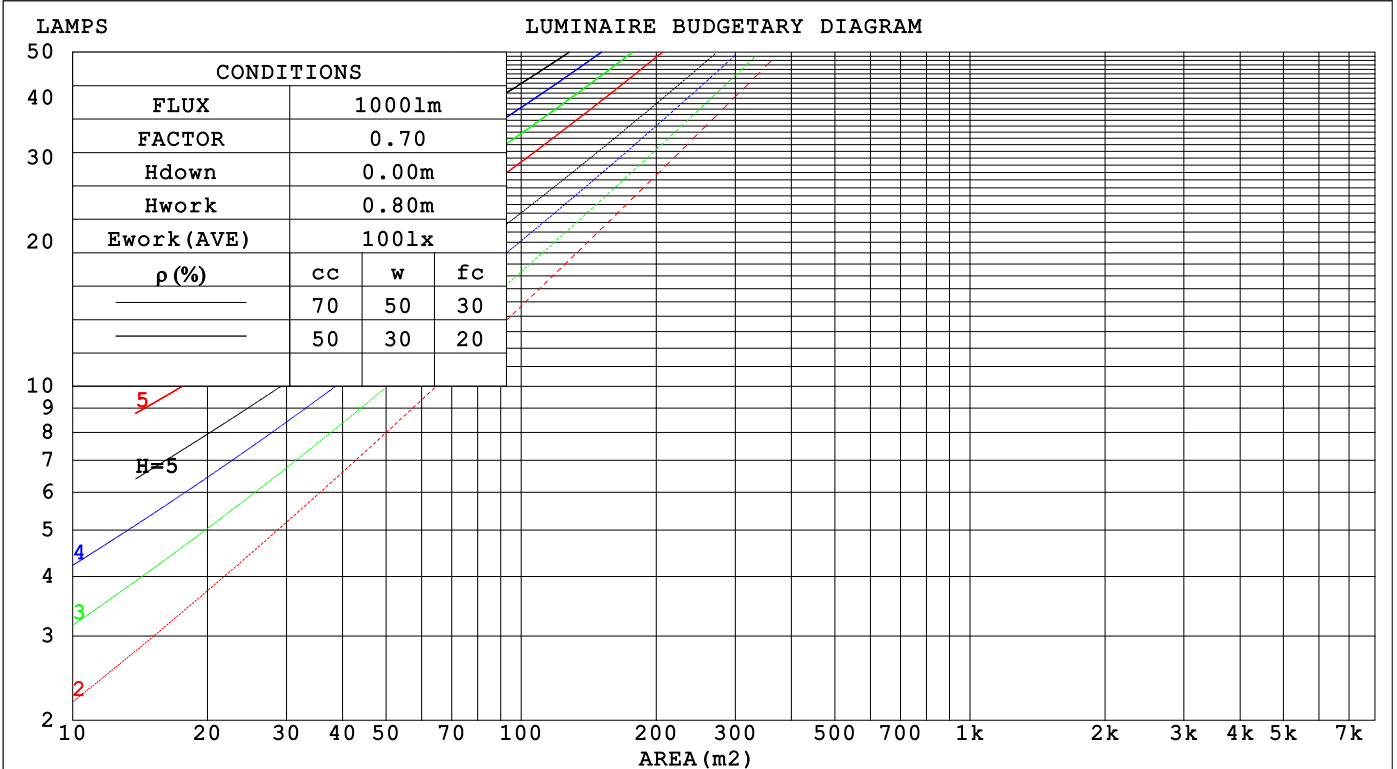

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-15

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.30V I:0.1796A P:38.899W PF:0.9832 Freq:50.00Hz																	
Lamp Flux:5312.69x1 lm																	
NAME: 线条灯						TYPE:						WEIGHT:					
SPEC.:						DIM.:						SERIAL No.:					
MFR.: EVERFINE						SUR.:						Shielding Angle:					

ρ _{CC}	80%			70%			50%			30%			10%			0		
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0		
ρ _{fc}	20%			20%			20%			20%			20%			0		
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)											
0.0																		
1.0	.355	.202	.064	.344	.196	.062	.323	.186	.059	.304	.176	.056	.287	.166	.054			
2.0	.316	.173	.053	.306	.169	.052	.288	.160	.050	.271	.152	.048	.255	.144	.045			
3.0	.285	.152	.045	.276	.148	.044	.259	.141	.043	.244	.134	.041	.230	.127	.039			
4.0	.259	.134	.040	.251	.131	.039	.236	.125	.037	.222	.119	.036	.209	.113	.035			
5.0	.237	.121	.035	.229	.118	.034	.216	.112	.033	.203	.107	.032	.191	.102	.031			
6.0	.218	.109	.031	.211	.107	.031	.199	.102	.030	.187	.097	.029	.177	.093	.028			
7.0	.202	.100	.028	.196	.097	.028	.184	.093	.027	.174	.089	.026	.164	.085	.025			
8.0	.187	.092	.026	.182	.090	.025	.172	.086	.025	.162	.082	.024	.153	.079	.023			
9.0	.175	.085	.024	.170	.083	.023	.161	.079	.023	.152	.076	.022	.143	.073	.021			
10.0	.164	.079	.022	.160	.077	.022	.151	.074	.021	.143	.071	.020	.135	.068	.019			

ρ _{CC}	80%			70%			50%			30%			10%			0		
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0		
ρ _{fc}	20%			20%			20%			20%			20%			0		
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)											
0.0																		
1.0	.286	.286	.286	.245	.245	.245	.167	.167	.167	.096	.096	.096	.031	.031	.031			
2.0	.273	.229	.192	.233	.197	.166	.160	.136	.116	.092	.079	.068	.030	.026	.022			
3.0	.265	.212	.170	.227	.183	.147	.156	.127	.103	.090	.074	.061	.029	.024	.020			
4.0	.257	.199	.155	.221	.172	.135	.152	.120	.095	.088	.070	.056	.028	.023	.018			
5.0	.250	.189	.145	.214	.164	.126	.148	.114	.089	.086	.067	.053	.028	.022	.017			
6.0	.242	.181	.137	.208	.157	.119	.144	.110	.085	.083	.065	.050	.027	.021	.017			
7.0	.235	.174	.132	.202	.151	.115	.140	.106	.081	.081	.062	.048	.026	.020	.016			
8.0	.229	.169	.128	.197	.146	.111	.136	.103	.079	.079	.061	.047	.026	.020	.016			
9.0	.223	.164	.124	.192	.142	.108	.133	.100	.077	.077	.059	.046	.025	.019	.015			
10.0	.217	.160	.122	.187	.139	.106	.130	.098	.075	.076	.058	.045	.025	.019	.015			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-15

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.30V I:0.1796A P:38.899W PF:0.9832 Freq:50.00Hz										
Lamp Flux:5312.69x1 lm										
NAME: 线条灯			TYPE:				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.:			
MFR.: EVERFINE			SUR.:				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.7	11.1	10.1	11.5	12.0	8.3	9.7	8.8	10.2	10.6
3H	11.9	13.2	12.4	13.7	14.1	9.7	11.0	10.2	11.5	12.0
4H	13.0	14.3	13.5	14.7	15.3	10.3	11.5	10.7	12.0	12.5
6H	14.2	15.4	14.7	15.9	16.4	10.6	11.7	11.1	12.2	12.7
8H	14.8	15.9	15.3	16.4	17.0	10.6	11.7	11.1	12.2	12.8
12H	15.6	16.7	16.1	17.2	17.7	10.6	11.7	11.1	12.2	12.7
4H 2H	10.3	11.5	10.7	12.0	12.5	9.2	10.5	9.7	10.9	11.4
3H	12.7	13.8	13.2	14.3	14.8	10.9	12.0	11.4	12.5	13.0
4H	14.0	15.0	14.6	15.5	16.1	11.6	12.5	12.1	13.1	13.7
6H	15.4	16.3	16.0	16.8	17.5	12.0	12.9	12.6	13.5	14.1
8H	16.1	16.9	16.7	17.5	18.2	12.1	12.9	12.7	13.5	14.2
12H	17.0	17.8	17.6	18.3	19.0	12.2	12.9	12.8	13.5	14.2
8H 4H	14.3	15.1	14.9	15.7	16.3	12.3	13.1	12.8	13.7	14.3
6H	15.9	16.6	16.6	17.2	17.9	13.0	13.7	13.6	14.3	15.0
8H	16.9	17.5	17.5	18.1	18.8	13.2	13.9	13.9	14.5	15.2
12H	18.0	18.5	18.7	19.2	19.9	13.4	14.0	14.1	14.6	15.4
12H 4H	14.3	15.1	14.9	15.6	16.3	12.4	13.2	13.0	13.8	14.5
6H	16.0	16.6	16.7	17.3	18.0	13.3	13.9	14.0	14.6	15.3
8H	17.0	17.6	17.7	18.2	19.0	13.7	14.3	14.4	14.9	15.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 5313 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 5.8)
 Area: 0.627 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-15

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.30V I:0.1796A P:38.899W PF:0.9832 Freq:50.00Hz Lamp Flux:5312.69x1 lm		
NAME: 线条灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	51	39	32	50	39	32	49	38	31	25
0.80	61	48	40	59	48	40	57	46	39	32
1.00	69	56	48	67	55	48	64	56	47	39
1.25	76	64	56	74	63	55	70	60	54	45
1.50	81	69	61	78	68	60	74	65	59	49
2.00	88	78	70	85	76	69	80	72	66	56
2.50	92	83	75	89	81	74	84	77	71	60
3.00	96	87	80	92	85	79	87	80	75	63
4.00	100	93	87	97	90	85	90	85	81	68
5.00	103	97	91	99	94	89	93	88	84	71
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-15

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.30V I:0.1796A P:38.899W PF:0.9832 Freq:50.00Hz Lamp Flux:5312.69x1 lm		
NAME: 线条灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

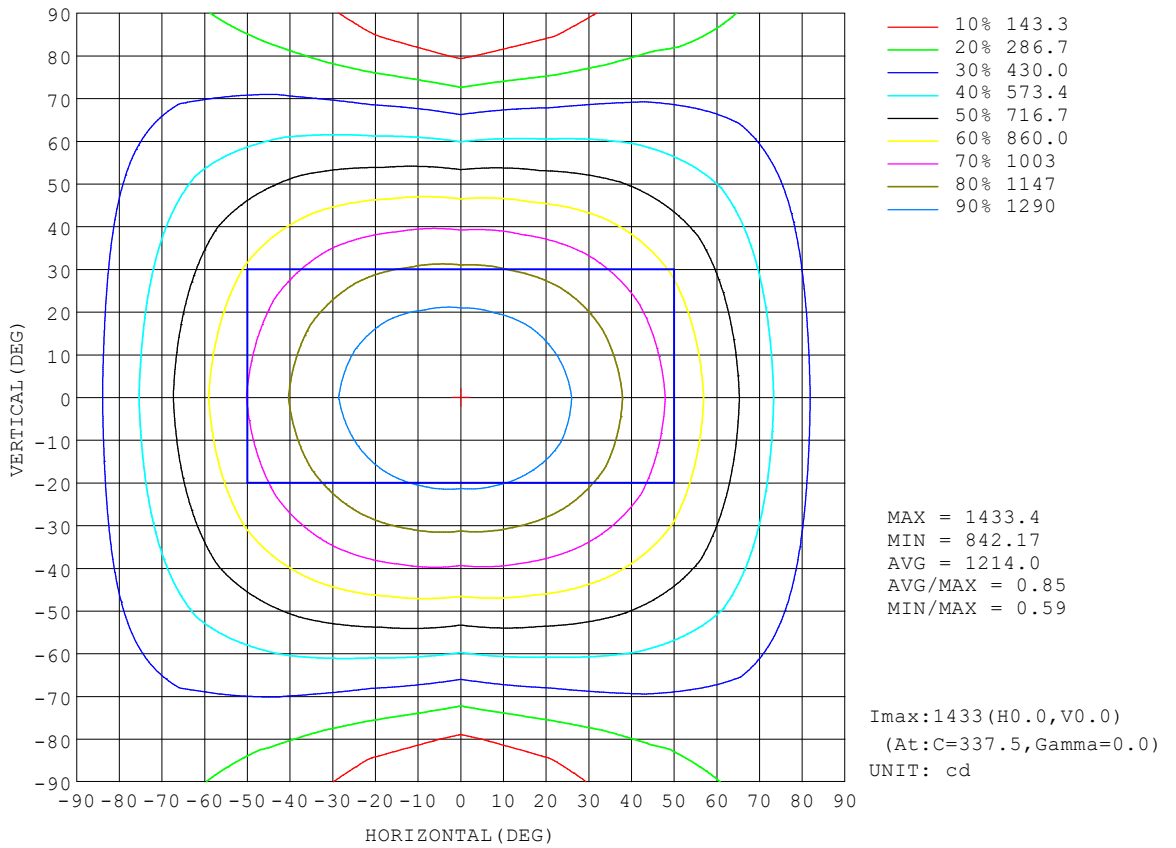


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-15

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.30V I:0.1796A P:38.899W PF:0.9832 Freq:50.00Hz Lamp Flux:5312.69x1 lm		
NAME: 线条灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

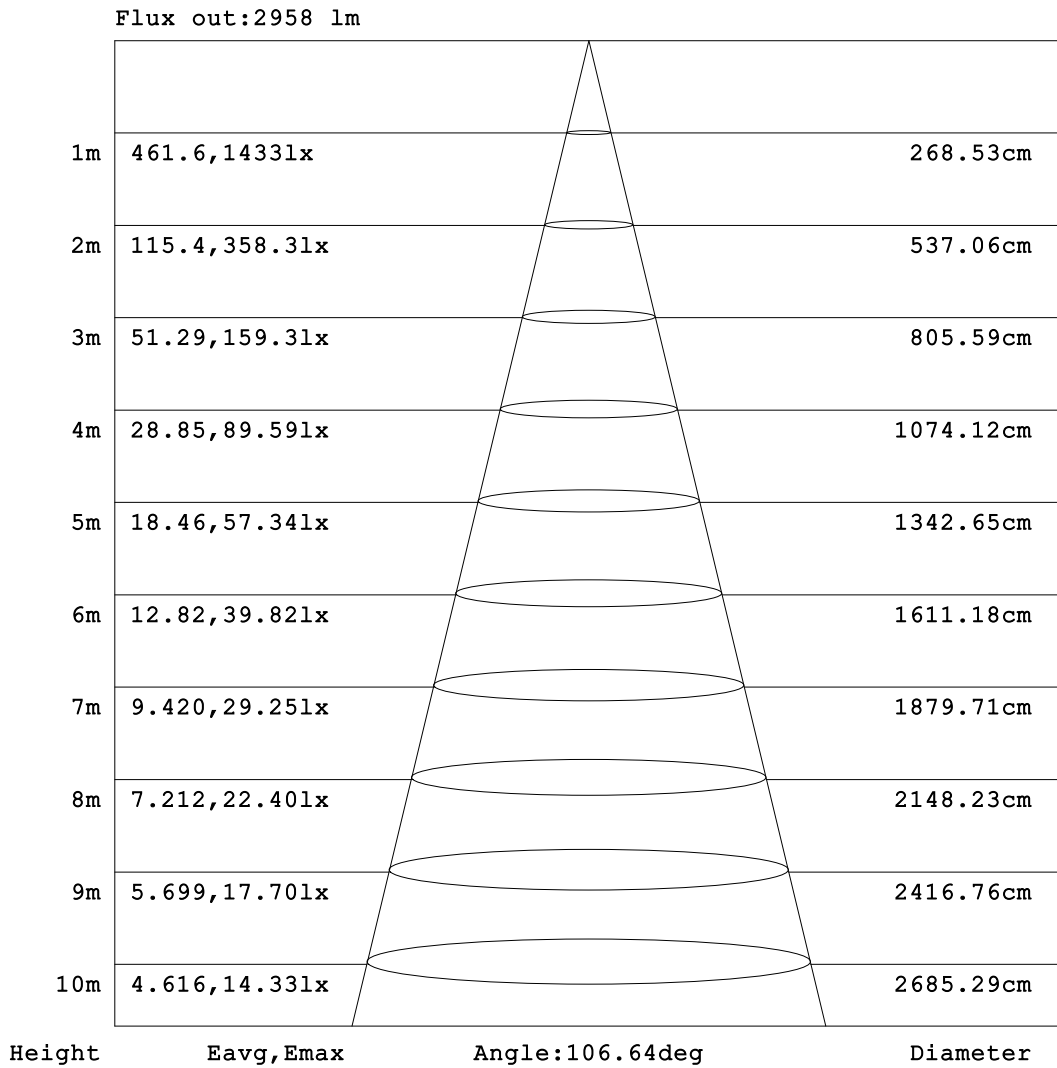


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 2023-11-15

γ Range: 0 - 180DEG
γ Interval: 5.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity: 65.0%
Test Distance: 9.401m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.30V I:0.1796A P:38.899W PF:0.9832 Freq:50.00Hz Lamp Flux:5312.69x1 lm		
NAME: 线条灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

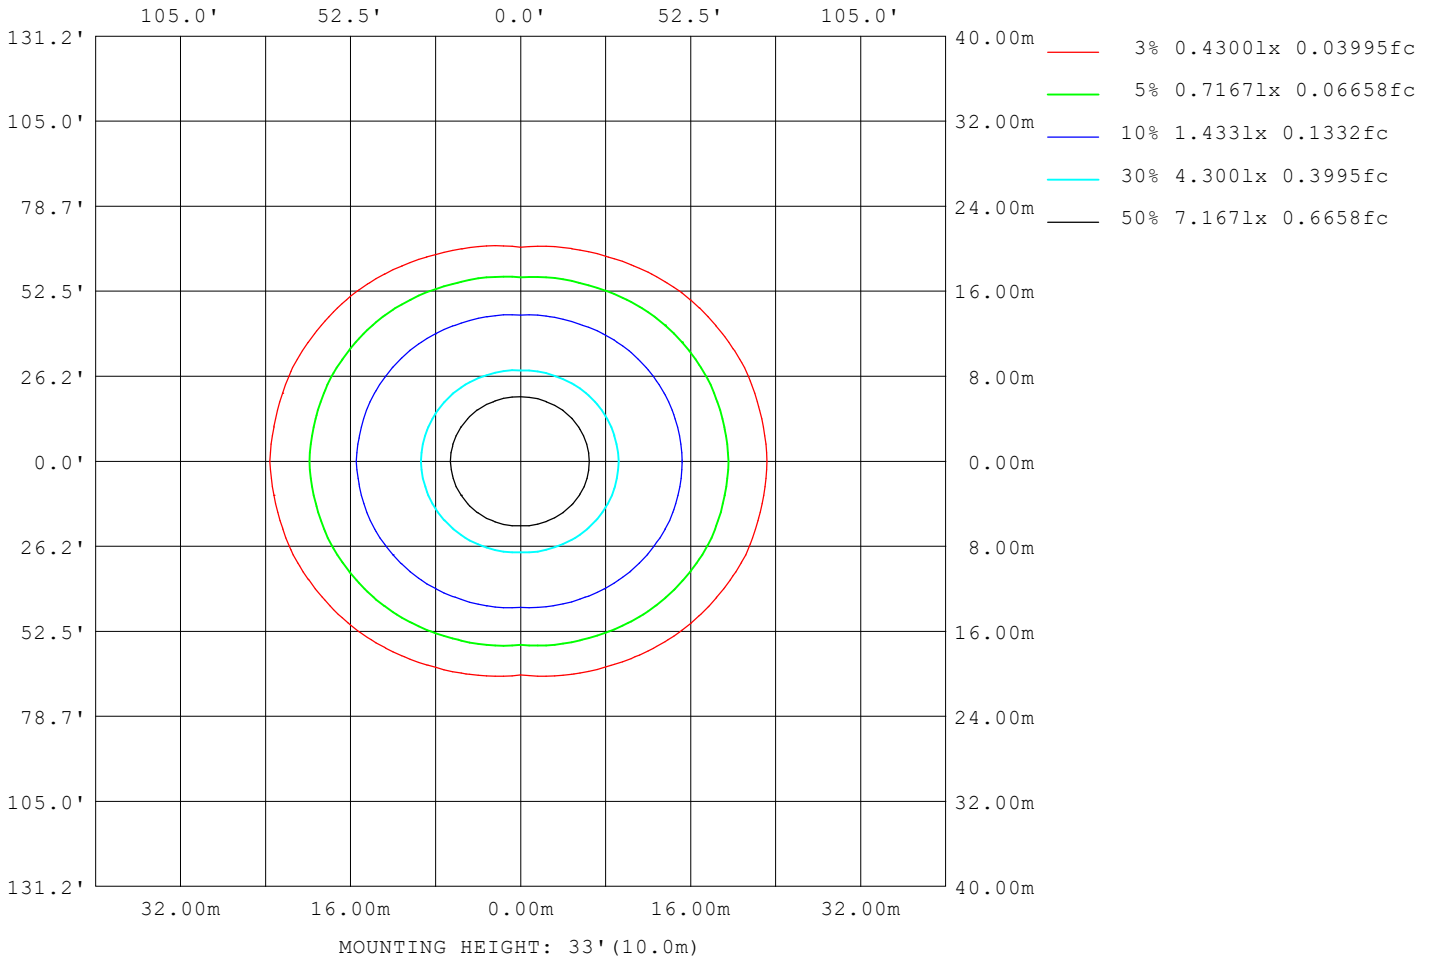

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-15

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.30V I:0.1796A P:38.899W PF:0.9832 Freq:50.00Hz Lamp Flux:5312.69x1 lm		
NAME: 线条灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2779
L_0~180 (75) av	3444
L_0~180 (85) av	7257
L_90~270 (65) av	1720
L_90~270 (75) av	1413
L_90~270 (85) av	770
L_45 (65) av	2371
L_45 (75) av	2711
L_45 (85) av	5020

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-11-15

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

Planar Illuminance Curve

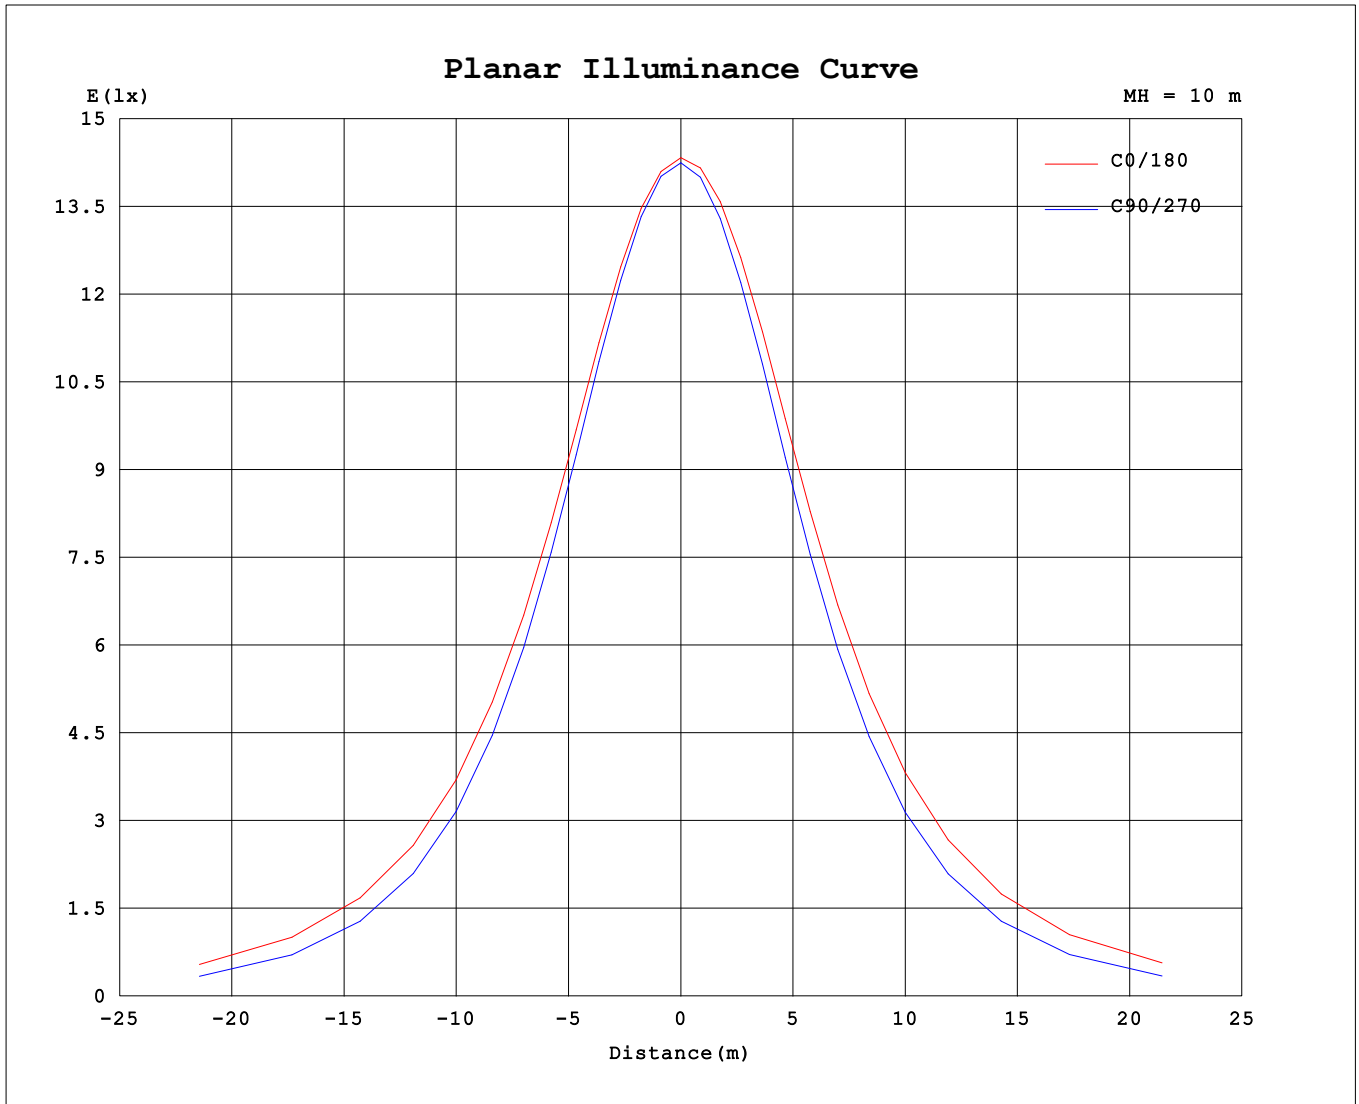

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-11-15

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.30V I:0.1796A P:38.899W PF:0.9832 Freq:50.00Hz Lamp Flux:5312.69x1 lm		
NAME: 线条灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1426	1426	1426	1426	1426	1426	1426	1426	1426	1426	1426	1426	1426	1426	1426	1426			
5	1419	1420	1420	1420	1419	1421	1423	1424	1425	1423	1422	1419	1418	1417	1418	1419			
10	1403	1404	1401	1398	1397	1401	1407	1412	1415	1411	1405	1397	1394	1394	1399	1403			
15	1377	1377	1371	1364	1360	1368	1379	1390	1394	1387	1377	1362	1355	1357	1367	1375			
20	1340	1340	1329	1316	1309	1322	1339	1355	1362	1353	1336	1314	1303	1308	1325	1336			
25	1294	1293	1276	1257	1245	1263	1288	1311	1320	1308	1285	1255	1239	1247	1271	1289			
30	1240	1237	1213	1187	1170	1194	1227	1257	1269	1254	1224	1186	1164	1177	1208	1233			
35	1180	1174	1143	1108	1086	1115	1158	1195	1211	1192	1155	1107	1080	1097	1138	1169			
40	1113	1105	1067	1022	993	1029	1081	1127	1146	1124	1080	1022	989	1011	1061	1100			
45	1042	1031	985	930	894	937	999	1053	1076	1051	999	931	891	919	979	1026			
50	967	953	898	834	790	840	913	975	1001	973	913	835	788	823	893	947			
55	888	871	809	734	681	739	822	893	923	891	824	736	681	724	803	865			
60	804	785	716	630	569	635	729	807	840	807	733	634	570	621	712	780			
65	718	697	622	526	454	530	634	719	755	719	639	534	458	522	618	692			
70	630	607	527	422	339	424	539	629	666	630	545	431	345	417	524	602			
75	541	517	433	321	226	323	444	538	577	540	452	330	233	315	431	511			
80	455	430	344	227	122	228	354	450	490	452	364	235	129	222	343	422			
85	382	360	270	150	39.0	149	277	372	411	374	285	157	45.2	145	265	345			
90	337	312	226	107	4.45	103	228	320	354	320	233	109	6.11	94.5	213	298			
95	309	285	203	88.9	4.56	85.9	204	292	319	289	209	91.5	5.52	80.2	192	275			
100	283	259	182	75.7	4.84	73.6	184	266	293	260	188	78.7	5.82	60.5	171	251			
105	257	235	160	64.2	5.42	64.5	165	242	268	238	169	69.0	6.46	55.7	146	226			
110	232	212	138	53.8	5.98	57.6	148	218	243	215	149	61.6	6.49	47.0	119	201			
115	208	188	115	46.7	6.51	52.0	132	196	219	194	132	55.4	7.12	41.5	101	181			
120	186	164	95.7	39.6	7.12	47.3	118	175	196	174	118	50.3	7.75	35.5	87.9	159			
125	164	143	80.1	34.4	7.73	43.1	105	155	173	154	105	45.8	8.38	31.4	74.6	138			
130	144	119	67.6	30.3	8.37	39.3	92.5	136	152	135	93.4	41.6	9.01	28.6	62.6	70.4			
135	125	95.5	58.1	27.0	9.03	35.7	81.2	118	132	118	82.2	37.7	9.66	25.8	53.8	87.2			
140	108	76.7	48.8	24.2	9.72	32.3	70.6	102	114	102	71.6	33.9	10.3	23.5	46.9	70.6			
145	91.0	62.5	40.9	22.0	10.5	29.0	60.6	86.4	96.2	86.2	61.5	30.4	11.0	21.7	40.4	59.6			
150	75.6	50.0	34.3	21.1	11.2	25.3	51.3	71.9	79.7	71.7	52.1	26.4	11.6	20.8	33.4	48.6			
155	61.2	39.5	29.6	19.5	11.9	22.1	42.5	58.4	64.4	58.2	43.2	22.9	12.2	19.7	29.1	39.2			
160	47.3	30.8	26.1	18.5	12.5	19.6	34.2	46.0	50.3	45.8	34.9	20.1	12.7	18.4	26.0	30.6			
165	35.5	24.0	22.1	17.1	13.0	17.3	26.3	34.6	37.3	34.4	26.8	17.6	13.1	17.0	22.6	23.4			
170	20.0	18.9	18.7	15.6	13.4	15.4	20.2	24.4	20.6	24.3	20.5	15.5	13.5	15.6	19.0	19.5			
175	15.4	15.8	15.5	14.2	13.7	13.9	15.7	17.2	15.9	16.9	15.7	13.9	13.8	14.3	15.6	16.1			
180	13.8	13.8	13.8	13.9	13.9	13.9	14.0	14.0	13.9	13.8	13.8	13.8	13.9	13.9	14.0	14.0			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-11-15

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks: